
# ASO Safety Solutions SENTIR Tapered Edge Safety Contact Mats



Use wire leads
brown and blue (1 & 3) for continuity
and
white and black (2 & 4) for continuity.
(See safety relay for wiring)

SENTIR safety contact mats are laminar sections which are used to safeguard dangerous areas in industrial and production automation settings. Stepping on the mat triggers an immediate "stop" signal in order to prevent endangering movements.

SENTIR Tapered mats have an integrated taper profile ideal for placement without requiring additional edging. A single 6m cable is included to allow direct connection in a 4-wire circuit.

#### **Features**

- Built-in ramp for flexible mounting and mat configurations
- 6m cable ideal for 4-wire circuits
- Anti-slip surface
- Tested to more than 6 million activations
- Standard sizes available
- Resistant against most contaminants and moisture up to IP65



ASO Safety Solutions Contact Mats - Tapered Edge Style									
Part Number	Price	Width (W)	Length (L)	Operating Voltage	Cable Length	Connection			
1602-4560		24in (609.6 mm)	24in (609.6 mm)						
1602-4090		24in (609.6 mm)	36in (914.4 mm)						
1602-4091		24in (609.6 mm)	48in (1219.2 mm)						
1602-4092		24in (609.6 mm)	60in (1524.0 mm)	24VDC, 100mA	19.6 ft (6m)	Pigtail			
1602-4093		36in (914.4 mm)	36in (914.4 mm)						
1602-4094		36in (914.4 mm)	48in (1219.2 mm)						
1602-4095		36in (914.4 mm)	60in (1524.0 mm)						


Tapered Edge Safety Contact Mats					
	General Specifications				
Height	14mm (0.55 in) with covering				
Material	Polyurethane				
Weight	24.9 kg/m2 (1.5 lb/ft2)				
Switching Pressure	Test piece Ø 80mm (3.15 in) = approximately 150N				
Inactive Edge	16mm (0.63 in); (Not including the tapered edge)				
Static Load	Max. 2,000N on Ø 80mm (3.15 in), tested according to DIN EN ISO 13856-1				
Response Time	< 25ms, tested according to DIN EN ISO 13856-1				
Electrical Capacity	24VDC, 100mA				
Mechanical Life	>1,000,000 cycles				
Protection Class	IP65				
Temperature Range	-10° to +55° C (+14° to +131°F)				
Agency Approvals	CE, cULus file E329422				

## ASO Safety Solutions SENTIR Tapered Edge Safety Contact Mats

### **Dimensions**

mm [in]

#### Contact Mats - Tapered Edge (1602-4XXX)

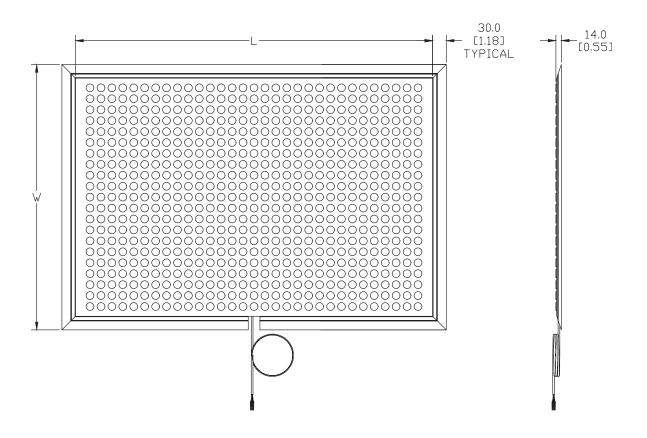

Part Information – Contact Mats – Tapered Edge Style							
Part Number	Price	W mm (in)	L mm (in)	D mm (in)			
1602-4560		609.6 (24)	609.6 (24)	14.0 (0.55)			
1602-4090			914.4 (36)				
1602-4091			219.9 (48)				
1602-4092			1524.0 (60)				
1602-4093			914.4 (36)				
1602-4094		914.4 (36)	219.9 (48)				
1602-4095			1524.0 (60)				

### **Safety Products**



Warning: Safety products sold by AutomationDirect are Safety components only. The purchaser/installer is solely responsible for the application of these components and ensuring all necessary steps have been taken to assure each application and use meets all performance and applicable safety requirements and/or local, national and/or international safety codes as required by the application. AutomationDirect cannot certify that our products, used solely or in conjunction with other AutomationDirect or other vendors' products, will assure safety for any application. Any person using or applying any products sold by AutomationDirect is responsible for learning the safety requirements for their individual application and applying them, and therefore assumes all risks, and accepts full and complete responsibility, for the selection and suitability of the product for their respective application.

AutomationDirect does not provide design or consulting services, and cannot advise whether any specific application or use of our products would ensure compliance with the safety requirements for any application.