


# Analog Input Modules

## P2-08THM

### Thermocouple Analog Input

The P2-08THM Thermocouple Input Module provides eight differential channels for receiving thermocouple and voltage input signals.

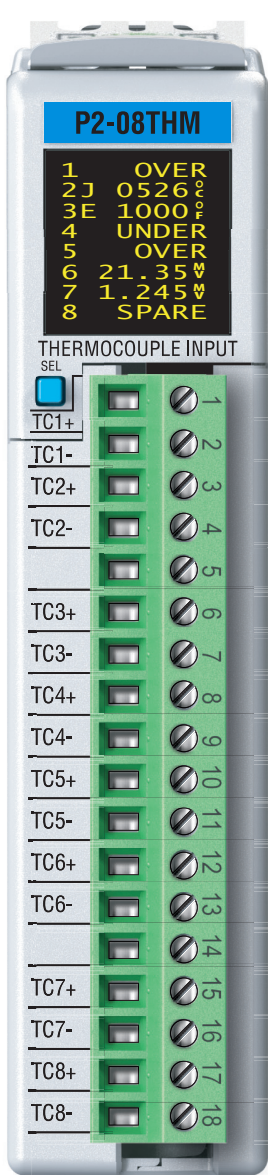

Terminal block included

Thermocouple Input Specifications	
<b>Input Channels</b>	8 Differential
<b>Data Format</b>	Floating Point
<b>Common Mode Range</b>	±1.25 V
<b>Common Mode Rejection</b>	100dB @ DC and 130dB @ 60Hz
<b>Input Impedance</b>	>5MΩ
<b>Maximum Ratings</b>	Fault protected inputs to ±50V
<b>Resolution</b>	16-bit, ±0.1°C or °F
<b>Thermocouple Input Ranges</b>	Type J -190° to 760°C (-310° to 1400°F); Type E -210° to 1000°C (-346° to 1832°F); Type K -150° to 1372°C (-238° to 2502°F); Type R 65° to 1768°C (149° to 3214°F); Type S 65° to 1768°C (149° to 3214°F); Type T -230° to 400°C (-382° to 752°F); Type B 529° to 1820°C (984° to 3308°F); Type N -70° to 1300°C (-94° to 2372°F); Type C 65° to 2320°C (149° to 4208°F);
<b>Cold Junction Compensation</b>	Automatic
<b>Thermocouple Linearization</b>	Automatic
<b>Accuracy vs. Temperature</b>	±50PPM per °C (maximum)
<b>Linearity Error</b>	±1°C maximum (±0.5°C typical) Monotonic with no missing codes.
<b>Maximum Inaccuracy</b>	±3°C maximum (including temperature drift but excluding thermocouple error).
<b>Warm-up Time</b>	30 minutes for ±1% repeatability 2 minutes to reach voltage specifications
<b>Sample Duration Time</b>	270ms
<b>All Channel Update Rate</b>	2.16 s
<b>Open Circuit Detection Time</b>	Within 2s
<b>Conversion Method</b>	Sigma-Delta
<b>External DC Power Required</b>	None

Removable Terminal Block Specifications		
Part Number	P2-RTB (included)	P2-RTB-1
<b>Number of positions</b>	18 screw terminals	18 spring clamp terminals
<b>Wire Range*</b>	30–16 AWG (0.051–1.31 mm <sup>2</sup> ) Solid / stranded conductor 3/64 in (1.2 mm) insulation maximum 1/4 in (6–7 mm) strip length	28–16 AWG (0.081–1.31 mm <sup>2</sup> ) Solid / stranded conductor 3/64 in (1.2 mm) insulation maximum 19/64 in (7–8 mm) strip length
<b>Conductors*</b>	Use Thermocouple Extension wire for thermocouples. Use copper conductors, 75°C or equivalent for millivolt inputs.	
<b>Screw Driver Width</b>	0.1 in (2.5 mm) maximum	N/A
<b>Screw Size</b>	M2	N/A
<b>Screw Torque</b>	2.5 lb-in (0.28 N-m)	N/A

\* Use shielded, twisted thermocouple wire that matches the thermocouple type.

# Analog Input Modules

## P2-08THM (cont'd)

Configuration/Diagnostics	
<b>Burn-out Detection: High Side/Disable</b>	1 bit per module
<b>°C/°F (T/C Only)</b>	1 bit per module
<b>Module Diagnostics Failure</b>	1 bit per module
<b>Burn-out (on if T/C input is open – no connection between TCn+ and TCn-)</b>	1 bit per channel
<b>Channel Under-range (T/C only)</b>	1 bit per channel
<b>Channel Over-range (T/C only)</b>	1 bit per channel

Voltage Input Specifications	
<b>Linear mV Device Input Ranges</b>	0–39.0625 mVDC, ±39.0625 mVDC, ±78.125 mVDC, 0–156.25 mVDC, ±156.25 mVDC, 0–1250 mVDC
<b>Max Voltage Input Offset Error</b>	0.05% @ 0° - 60°C, typical 0.04% @ 25°C
<b>Max Voltage Input Gain Error</b>	0.06% @ 25°C
<b>Max Voltage Input Linearity Error</b>	0.05% @ 0° - 60°C, typical 0.03% @ 25°C
<b>Max Voltage Input Impedance</b>	0.2% @ 0° - 60°C, typical 0.06% @ 25°C

General Specifications	
<b>Operating Temperature</b>	0° to 60°C (32° to 140°F)
<b>Storage Temperature</b>	-20° to 70°C (-4° to 158°F)
<b>Humidity</b>	5 to 95% (non-condensing)
<b>Environmental Air</b>	No corrosive gases permitted
<b>Vibration</b>	IEC60068-2-6 (Test Fc)
<b>Shock</b>	IEC60068-2-27 (Test Ea)
<b>Field to Logic Side Isolation</b>	1800VAC applied for 1 second
<b>Heat Dissipation</b>	500mW
<b>Enclosure Type</b>	Open equipment
<b>Module Keying to Backplane</b>	Electronic
<b>Module Location</b>	Any I/O slot in a Productivity2000 system
<b>Field Wiring</b>	Removable terminal block (included). The P2-08THM module is not compatible with the ZIPLink wiring system.
<b>Connector Type (included)</b>	18-position removable terminal block
<b>Weight</b>	90g (3.2 oz)
<b>Agency Approvals**</b>	UL508 File E139594, Canada & USA CE (EN61131-2*)




\*Meets EMC and Safety requirements. See the Declaration of Conformity for details.

\*\*To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific component part number web page.

# Analog Input Modules

## P2-08THM (cont'd)


### Wiring Diagrams

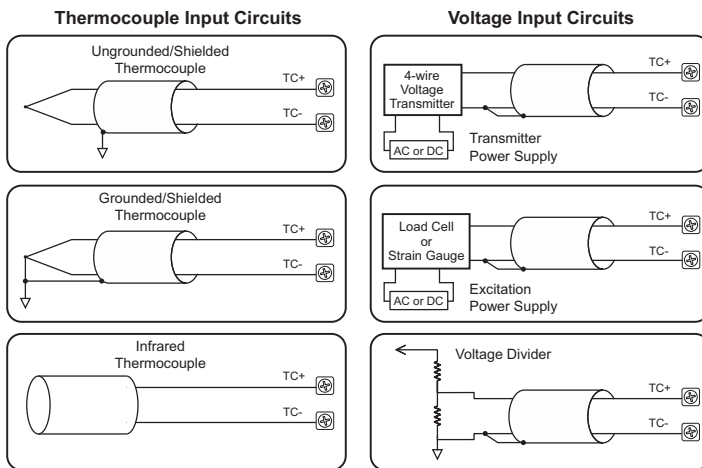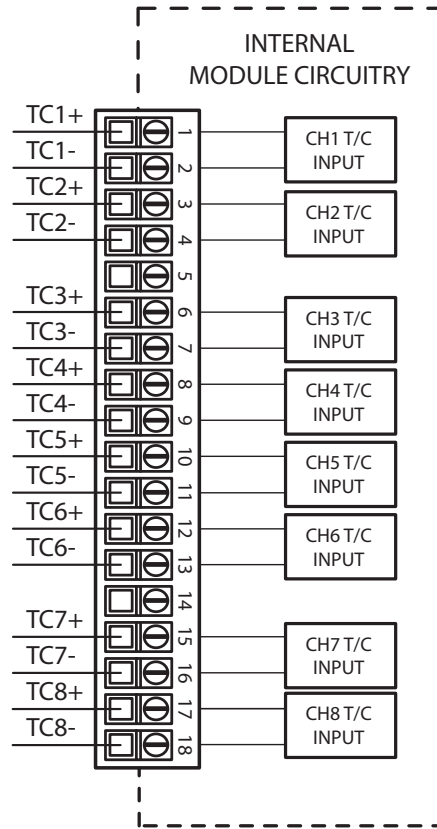

**NOTE:** Install jumper wire on each unused input; TC+, TC-.

**NOTES:**

1. Connect shield to thermocouple signal/ground only. Do not connect to both ends.
2. With grounded thermocouples, take precautions to prevent having a voltage potential between thermocouple tips. A voltage of 1.25V or greater between tips will skew measurements.
3. Use shielded, twisted thermocouple extension wire that matches the thermocouple type. Use thermocouple-compatible junction blocks.

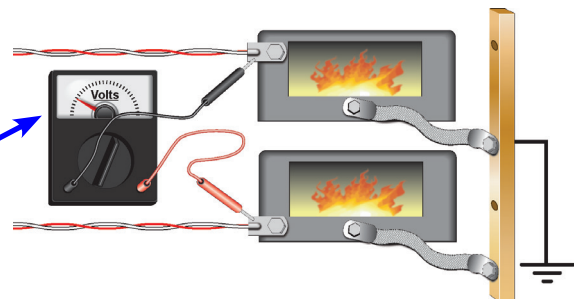

# I/O Modules

A variety of discrete, analog and specialty I/O modules are available for use in a Productivity2000 system. Specifications for each module are on the following pages.

A filler module is available for unused I/O module slots (part number P2-FILL).

## Discrete Input Modules

Productivity2000 Discrete Input Modules			
Part Number	Number of Inputs	Description	Price
P2-08SIM	8	Input Simulator Module	
P2-08ND3-1	8	Sinking/Sourcing 12-24 VDC	
P2-16ND3-1	8	Sinking/Sourcing 24V AC/DC	
P2-32ND3-1	16	Sinking/Sourcing 12-24 VDC	
P2-08NE3	16	Sinking/Sourcing 24V AC/DC	
P2-16NE3	32	Sinking/Sourcing 12-24 VDC	
P2-32NE3	32	Sinking/Sourcing 24V AC/DC	
P2-08NAS	8	AC Isolated 100-120 VAC	
P2-16NA	16	AC 100-240 VAC	

## Specialty Modules

Productivity2000 Specialty Modules			
Part Number	Number of Channels	Description	Price
P2-HSI	2	High-Speed Input	
P2-HSO**	2	High-Speed Output	
P2-02HSC	2	High-Speed Counter	
P2-04PWM	4	Pulse-Width Modulation	
P2-SCM	4 ports	Serial Communications Module	

\*\* ZIPLink required.

## Analog Output Modules

Productivity2000 Analog Output Modules			
Part Number	Number of Channels	Description	Price
P2-04DA	4	Analog Output (Voltage/Current)	
P2-04DA-1	4	Analog Output (Current)	
P2-04DA-2	4	Analog Output (Voltage)	
P2-04DAL-1*	4	Analog Output (Current)	
P2-04DAL-2*	4	Analog Output (Voltage)	
P2-08DA-1	8	Analog Output (Current)	
P2-08DA-2	8	Analog Output (Voltage)	
P2-08DAL-1*	8	Analog Output (Current)	
P2-08DAL-2*	8	Analog Output (Voltage)	
P2-16DA-1	16	Analog Output (Current)	
P2-16DA-2	16	Analog Output (Voltage)	
P2-16DAL-1*	16	Analog Output (Current)	
P2-16DAL-2*	16	Analog Output (Voltage)	

\* Low resolution analog modules without OLED display.

## Discrete Output Modules

Productivity2000 Discrete Output Modules			
Part Number	Number of Outputs	Description	Price
P2-08TD1S	8	Isolated Sinking	
P2-08TD2S	8	Isolated Sourcing	
P2-15TD1	15	Sinking	
P2-15TD2	15	Sourcing	
P2-08TD1P	8	Sinking Protected	
P2-08TD2P	8	Sourcing Protected	
P2-16TD1P	16	Sinking Protected	
P2-16TD2P	16	Sourcing Protected	
P2-32TD1P	32	Sinking Protected	
P2-32TD2P	32	Sourcing Protected	
P2-08TAS	8	Isolated AC	
P2-16TA	16	100-240 VAC Output	
P2-08TRS	8	Isolated Relay	
P2-16TR	16	Relay	

## Analog Input Modules


Productivity2000 Analog Input Modules			
Part Number	Number of Channels	Description	Price
P2-04AD	4	Analog Input (Voltage/Current)	
P2-04AD-1	4	Analog Input (Current)	
P2-04AD-2	4	Analog Input (Voltage)	
P2-08AD-1	8	Analog Input (Current)	
P2-08AD-2	8	Analog Input (Voltage)	
P2-08ADL-1*	8	Analog Input (Current)	
P2-08ADL-2*	8	Analog Input (Voltage)	
P2-16AD-1	16	Analog Input (Current)	
P2-16AD-2	16	Analog Input (Voltage)	
P2-16ADL-1*	16	Analog Input (Current)	
P2-16ADL-2*	16	Analog Input (Voltage)	
P2-06RTD	6	Analog RTD Input	
P2-08NTC	8	Analog Thermocouple Input	
P2-08THM	8	Analog Thermistor Input	

Productivity2000 Analog Input/Output Modules			
Part Number	Number of Channels	Description	Price
P2-8AD4DA-1	8/4	Analog Input/Output (Current)	
P2-8AD4DA-2	8/4	Analog Input/Output (Voltage)	


# I/O Module Installation Procedure

**WARNING:** DO NOT APPLY FIELD POWER UNTIL THE FOLLOWING STEPS ARE COMPLETED. SEE HOT-SWAP PROCEDURE FOR EXCEPTIONS.


**Step One:** Align module catch with base slot and module into connector.



**Step Two:** Pull top locking tab toward module face. Click indicates lock is engaged.

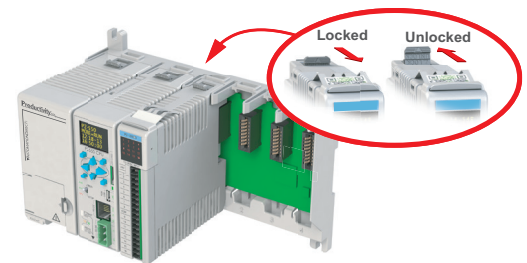

**Step Three:** Attach field wiring using removable terminal block or ZIPLink wiring system.

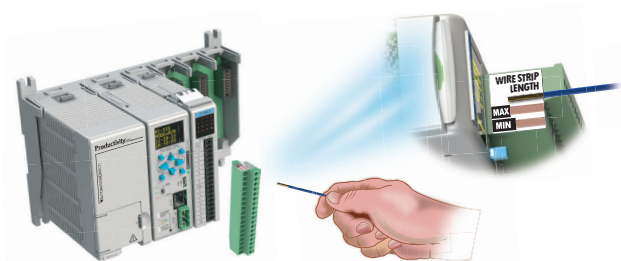

**WARNING:** EXPLOSION HAZARD – DO NOT CONNECT OR DISCONNECT CONNECTORS OR OPERATE SWITCHES WHILE CIRCUIT IS LIVE UNLESS THE AREA IS KNOWN TO BE NON-HAZARDOUS. DO NOT HOT-SWAP MODULES UNLESS THE AREA IS KNOWN TO BE NON-HAZARDOUS.