
CLICK PLUS Option Slot Module Specifications


<u>C2-DCM</u>


Communications Module

CLICK PLUS communication module, Modbus RTU and ASCII, 2 ports, (2) RS-232/RS-485 (6-pin terminal) port(s). For use with all CLICK PLUS PLCs. (2) C2-6TB terminal blocks included.



RS-232 Wiring



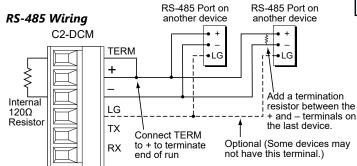

Port Specifications						
Number of Ports	2					
Port Types	RS-232, RS-485 (2-wire)					
Supported Protocols	Modbus RTU, ASCII (user-defined)					
Baud Rate	2400, 4800, 9600, 19200, 38400 (default), 57600, 115.2k bps					
Data Bits	7 bits, 8 bits (default)					
Parity	None, Odd (default), Even					
Stop Bits	1 bit (default), 2 bits					
Flow Control	None					
RS-485 Terminating Resistor	120Ω, Internal					
Status Indicator LEDs	OK, ERR, TX (per port), RX (per port)					

Modbus Specifications						
Station Number Range	1–247					
Timeout Setting	100ms, 200ms, 500ms, 1s, 2s, 5s, 10s, 20s, 30s					
Character Timeout	2–1000ms					
Response Delay Time	0–5000ms					
Modbus Function Codes	Master/Slave: 01 - Read Coil Status 02 - Read Input Bits 03 - Read Holding Register 04 - Read Input Register 05 - Write Single Coil 06 - Write Single Register 15 - Write Multiple Coils 16 - Write Multiple Registers					

General Specifications					
Operating Temperature	32°F to 131°F [0°C to 55°C]				
Storage Temperature	-4°F to 158°F [-20°C to 70°C]				
Ambient Humidity	30% to 95% relative humidity (non–condensing)				
Environmental Air	No corrosive gases Pollution Degree 2 (UL840)				
Environment	For indoor use only				
Vibration	5–9 Hz: 3.5 mm amplitude; 9–150 Hz: 1.0 G 10 sweep cycles per axis on each of 3 mutually perpendicular axes.				
Shock	15G peak, 11ms duration, 3 shocks in each direction per axis, on 3 mutually perpendicular axes.				
Bus Power Required	Max 60mA				
Drawing Link	PDF				
Weight	41g				



NOTE: There are no **ZIP**Link pre-wired PLC connection cables and modules for the C2-DCM.

CLICK PLUS Option Slot Module Specifications

General Specifications For All CLICK PLUS Option Slot Modules

These general specifications apply to all CLICK PLUS Option Slot Modules. Please refer to the appropriate I/O temperature derating charts under the Option Slot module and Stackable I/O module specifications to determine the best operating conditions based on the ambient temperature of your particular application.

Option Slot Module General Specifications						
Operating Temperature	32°F to 131°F [0°C to 55°C]					
Storage Temperature	-4°F to 158°F [-20°C to 70°C] IEC 60068-2-1 (Test Ab, Cold) IEC 60068-2-2 (Test Bb, Dry Heat) IEC 60068-2-14 (Test Na, Thermal Shock)					
Ambient Humidity	30% to 95% relative humidity (non-condensing)					
Environmental Air	No corrosive gases. Environmental pollution level is 2 (UL840)					
Environment	For Indoor Use Only					
Vibration	IEC60068-2-6 (Test Fc) 5–9Hz:3.5mm amplitude, 9–150Hz 1.0G 10 sweep cycles per axis on each of 3 mutually perpendicular axes.					
Shock	IEC60068-2-27 (Test Ea) 15G peak, 11ms duration, 3 shocks in each direction per axis, on 3 mutually perpendicular axes.					
Noise Immunity	<en61131-2> EN61000-4-2 (ESD) EN61000-4-3 (RFI) EN61000-4-4 (FTB) EN61000-4-6 (Conducted) EN61000-4-8 (Power frequency magnetic field immunity) <local test=""> Impulse Immunity : 1000V @ 1uS pulse</local></en61131-2>					
Emissions	EN55011 Class A (Radiated RF emission)					
Agency Approvals	UL61010 (File No. E157382, E316037); CE (EN61131-2); CUL Canadian C22.2					
Other	RoHS 2011/65/EU Amendment (EU)2015/863					



CLICK PLUS PLC Specifications

CLICK PLUS PLC Hardware/Software Compatibility

The table below shows the minimum software and hardware versions required for the CLICK PLUS PLCs and Option Slot Modules. The CLICK PLUS PLC can also utilize the CLICK Stackable I/O Modules, as any software and hardware version compatible with CLICK PLUS is also compatible with the CLICK Stackable I/O Modules.

CLICK PLUS PLC Features Software Compatibility								
		Minimum CLICK Software Version						
Device Type	Part Number	Hardware	High-Speed Inputs*	High-Speed Outputs*	EtherNet/IP	PID, DHCP, DNS, SNTP, MQTT		
	<u>C2-01CPU</u>	v3.00	v3.00	_	v3.00			
	<u>C2-02CPU</u>				N/A	v3.00		
CLICK PLUS CPU	<u>C2-03CPU</u>				v3.00			
CLICK PLUS CPU	C2-01CPU-2	v3.20	v3.20	v3.30 –	v3.20	v3.20		
	C2-02CPU-2				N/A			
	C2-03CPU-2				v3.20			
	<u>C2-14D1</u>	v3.00	v3.00	2.20	N/A			
	<u>C2-14D2</u>			v3.30		NI/A		
	<u>C2-14DR</u>			N1/A		N/A		
	<u>C2-14AR</u>		N/A	N/A				
Option Slot I/O Modules	C2-08D1-4VC	v3.00	v3.00	v3.30	N/A	N/A		
	C2-08D2-4VC							
	C2-08DR-4VC							
	C2-08AR-4VC		N/A	N/A				
	C2-08D1-6C	v3.00	v3.00	v3.30	N/A	N/A		
	C2-08D2-6C							
	C2-08DR-6C			N/A				
	C2-08AR-6C		N/A					
	C2-08D1-6V	- v3.00	v3.00	v3.30	N/A	N/A		
	C2-08D2-6V							
	<u>C2-08DR-6V</u>			N/A				
	<u>C2-08AR-6V</u>		N/A					
Option Slot Intelligent Modules	C2-DCM	v3.20	N/A	N/A	N/A	N/A		

* High-speed Inputs and Outputs are only available when the Option Slot I/O Module is installed in Slot 0.

Accessories

<u>C2-USER-M</u> CLICK PLUS PLC Hardware User Manual

Manual covers all CLICK PLUS PLC and I/O module installation and wiring, specifications, error codes and troubleshooting guide. The CLICK PLUS PLC Hardware User Manual can be downloaded free at the AutomationDirect Web site;



<u>CO-USER-M</u> CLICK PLC Hardware User Manual

Manual covers all CLICK PLC and I/O module installation and wiring, specifications, error codes and troubleshooting guide. The CLICK PLC Hardware User Manual can be downloaded free at the AutomationDirect Web site; _____



<u>C0-PGMSW</u> Programming Software CD-ROM

The programming software can be downloaded free at the AutomationDirect Web site, or the CD can be purchased from the AutomationDirect online Web store.



EA-MG-PGM-CBL

PC to Panel Programming Cable Assembly for C-more Micro-Graphic Panels and CLICK/CLICK PLUS PLCs

The 6-ft cable assembly connects a personal computer to any *C-more* Micro-Graphic panel, CLICK PLC, or select CLICK PLUS PLC for setup and programming.

Note: This cable assembly uses the PC's USB port and converts the signals to serial transmissions. The USB port supplies 5VDC to the Micro-Graphic panel for configuration operations.

Assembly includes standard USB A-type connector to B-type connector cable, custom converter, and an RS232C cable with an RJ12 modular connector on each end.



<u>USB-CBL-AMICB6</u> USB A to USB microB Programming Cable Assembly (CLICK PLUS Only)

Programming cable, USB A to USB microB, 6ft (1.83 m) length. For use with CLICK PLUS PLCs and most USB devices. The USB port supplies 5VDC to the CLICK PLUS CPU for programming.



<u>D2-DSCBL</u> Programming Cable for CLICK/CLICK PLUS and DirectLOGIC PLCs

12ft. (3.66 m) RS232 shielded PC programming cable for CLICK, select CLICK PLUS PLCs, DL05, DL06, DL105, DL205, D3-350, D4-450, D4-454, and Do-more H2 and T1H series CPUs. 9-pin D-shell female connector to an RJ12 6P6C connector.



Note: If your PC has a USB port but does not have a serial port, you must use programming cable <u>EA-MG-PGM-CBL</u> to connect to CLICK PLCs. For CLICK PLUS PLCs, you may also use <u>USB-CBL-AMICB6</u>

<u>C0-3TB</u> Spare 3-Pole Terminal Block

Replacement 3-pole terminal block for the 3-wire RS-485 Port 3 on CLICK Standard and Analog PLCs as well as the CLICK PLUS <u>C2-03CPU</u>. Sold in packs of 2.



<u>C0-4TB</u> Spare 24VDC Power Terminal Block

Replacement terminal block for the 24VDC supply power to the PLC. Sold in packs of 2.



<u>CO-8TB</u> Spare 8-Point I/O Terminal Block

Replacement terminal block for the 8-point I/O modules. Sold in packs of 2.



<u>C0-8TB-1</u> Spare 13-Point I/O Terminal Block

Replacement terminal block for the 8-point I/O relay modules. Sold in packs of 2.



<u>C0-16TB</u> Spare 16-Point I/O Terminal Block

Replacement terminal block for the 16-point I/O modules and PLC built-in I/O. Sold in packs of 2.



<u>C2-6TB</u> Spare 6-pt Terminal Block

Replacement terminal block for the C2-DCM serial ports. Sold in packs of 2.

