



Direct Mount Terminal Blocks

Direct mount terminal blocks do not require the use of a DIN rail to mount. By utilizing two mounting screws, they can be mounted to any backplane. They are supplied with or without wire protectors and can easily be cut to length with ordinary hand tools.

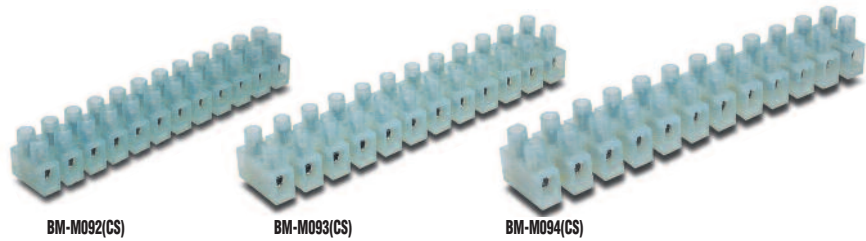


	Part Number	Pcs/Pkg	Price/Pkg	Part Number	Pcs/Pkg	Price/Pkg	Part Number	Pcs/Pkg	Price/Pkg
12 Pole, Without Wire Protector	BM-M092	50	<--->	BM-M093	50	<--->	BM-M094	50	<--->
12 Pole, With Wire Protector	BM-M092CS	50	<--->	BM-M093CS	50	<--->	BM-M094CS	50	<--->
Direct Mount Terminal Blocks Specifications									
UL Approval, Field Wiring	600V/ 250V**	10A	20-16 AWG	600V/ 250V**	20A	18-12 AWG	600V/ 250V**	30A	18-10 AWG
UL Approval, Factory Wiring	600V/ 250V**	15A	20-16 AWG	600V/ 250V**	30A	18-12 AWG	600V/ 250V**	40A	18-10 AWG
CSA Approval	150V/ 300V**	20A	18-16 AWG	150V/ 300V**	30A	18-14 AWG	150V/ 300V**	30A	18-10 AWG
CE Conformity	CE 93/68/EEC								
Agency File #	UL E70156, CSA LR 44081-9			UL E70156, CSA LR 44081-11			UL E70156, CSA LR 44081-12		
Wire Strip Length	0.39" (10mm)			0.39" (10mm)			0.39" (10mm)		
Tightening Torque	4.4 lb-in(0.5Nm)			7 lb-in			7 lb-in		
* UL Temperature Rating: 105° **Commercial Use									



BM-M092CS

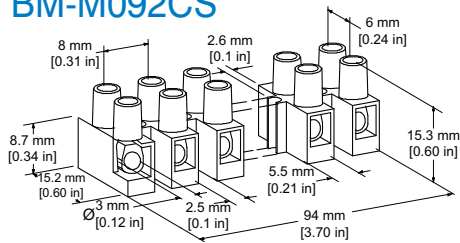

BM-M093CS

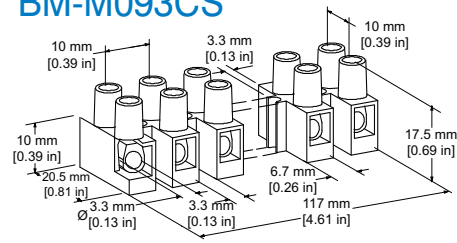

BM-M094CS

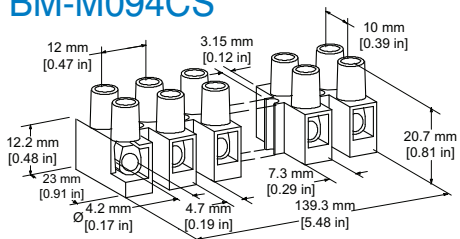

Wire protectors are metallic strips that physically isolate the conductor from the terminal screw. The protectors prevent cutting or nicking softer conductors.

Company Information

Systems Overview

Programmable Controllers

Field I/O

Software

C-more & other HMI

Drives

Soft Starters

Motors & Gearbox

Steppers/ Servos

Motor Controls

Proximity Sensors

Photo Sensors

Limit Switches

Encoders

Current Sensors

Pressure Sensors

Temperature Sensors

Pushbuttons/ Lights

Process

Relays/ Timers

Comm.

Terminal Blocks & Wiring

Power

Circuit Protection

Enclosures

Tools

Pneumatics

Appendix

Product Index

Part # Index