

Serial Remote I/O Master/Slave Modules


Remote I/O Master Module

D4-RM <--->



Remote I/O Slave Module

D4-RS <--->
D4-RSDC <--->

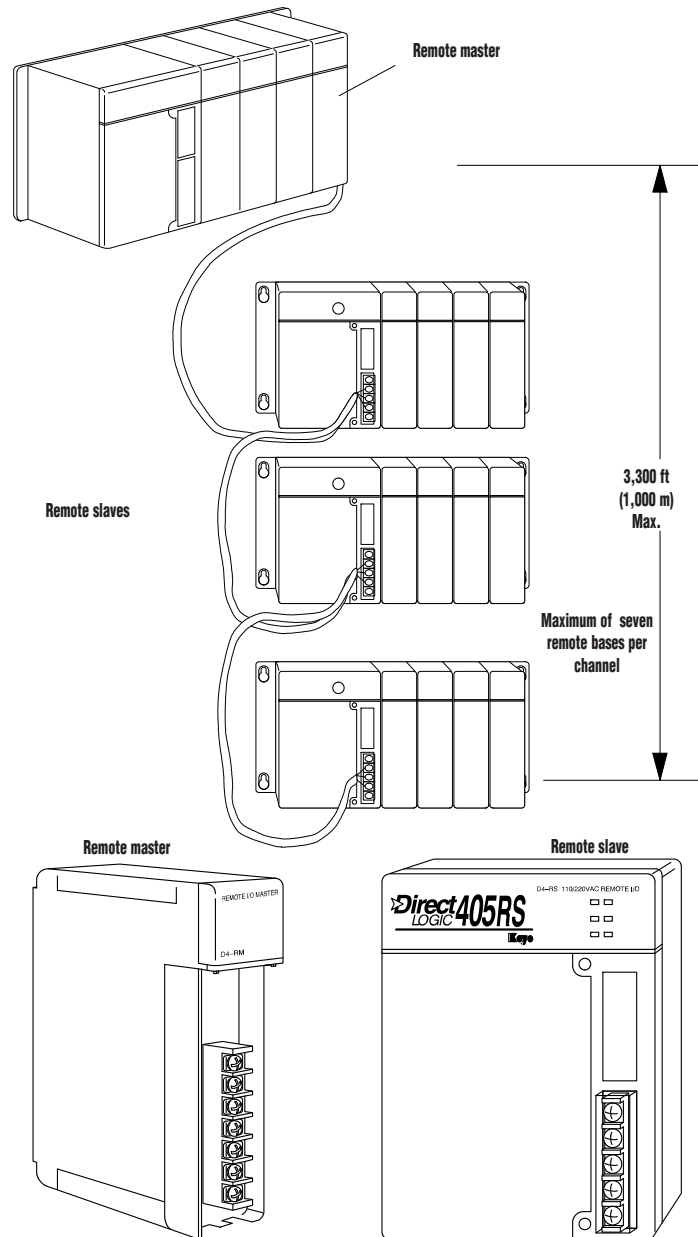

Overview


The DL405 offers full-size remote I/O. The goal of remote I/O is to reduce wiring costs by allowing I/O points to be located near the devices they are controlling. The chart at the bottom of this page shows the capacity for each CPU. The D4-450 has the D4-RM functionality built into the 25-pin port directly on the CPU. However, you can also choose to use the D4-RM discussed here. Here's how it works: A special module called the Remote Master is placed in the CPU base. This Master module controls up to seven Remote Slaves. The Remote Slaves are connected to the Master in a daisy-chain manner over a twisted pair communication cable (maximum length of 3,300 feet or 1,000m). Each Remote Slave attaches to a DL405 base (any size). Standard DL405 modules populate the remote bases.

You can assign normal input and output addresses to the remote points, or you can assign special remote I/O addresses. The Remote Master sends the remote I/O information to the CPU. The communication between the Remote Master and the CPU is asynchronous to the CPU scan. For this reason, remote I/O applications should be

limited to those that do not require the remote I/O points to be updated with every CPU scan.

	D4-450	D4-440	D4-430
Maximum number of remote masters supported	3*	2	2
Maximum I/O points supported	1536	1024	512
Maximum I/O points supported per channel	512	512	512
Maximum number of remote I/O bases per channel	7	7	7
<i>*max. of 2 D4-RM, 1 channel is via 25-pin CPU port</i>			

Serial Remote I/O Master/Slave Modules

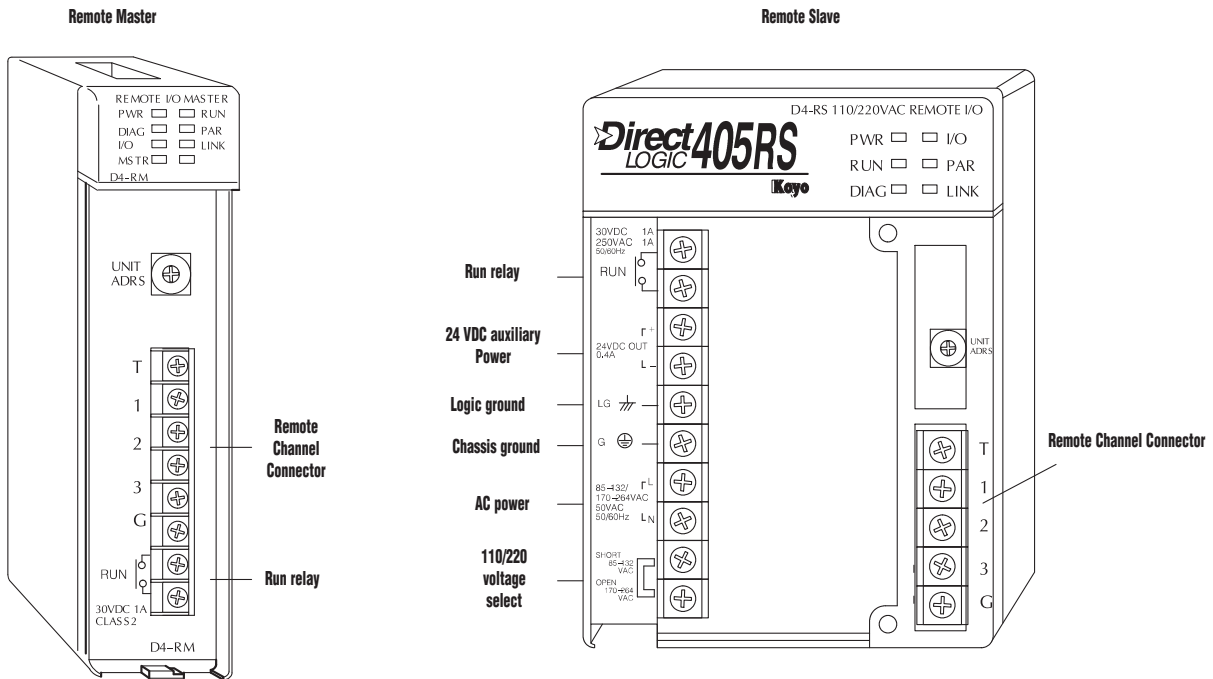

Remote Master Specifications	
Module Type	Intelligent device
Number of Masters per CPU	Two maximum for D4-430 and D4-440 Three maximum for D4-450
Maximum Slaves Supported	Seven slaves per channel
Communication to Slaves	RS485 via twisted pair with shield @ 38.4K baud
Recommended Cable	Belden 9841 or equivalent
Transmission Distance	3,300 ft. maximum
Terminal Type	Fixed
Operating Environment	0°C to 60°C (32°F to 140°F), 5% to 95% humidity (non-condensing)
Internal Power Consumption	300 mA maximum
Manufacturer	Koyo Electronics

Remote Slave Specifications	
Maximum Slave Points per CPU	512 for D4-430 1024 for D4-440 1536 for D4-450
I/O Addresses Used	I/O modules in slave bases do not automatically consume any standard input and output points. They consume remote I/O points at a rate equal to the number of I/O points in each base. However, you can choose to use standard I/O addresses as an option.
Terminal Type	Fixed
Operating Environment	0°C to 60°C (32°F to 140°F), 5% to 95% humidity (non-condensing)
Power Required	110VAC/220 VAC (D4-RS) 24VDC (D4-RSDC)
Manufacturer	Koyo Electronics

- PLC Overview
- DL05/06 PLC
- DL105 PLC
- DL205 PLC
- DL305 PLC
- DL405 PLC**
- Field I/O
- Software
- C-more HMIs
- Other HMI
- AC Drives
- Motors
- Steppers/Servos
- Motor Controls
- Proximity Sensors
- Photo Sensors
- Limit Switches
- Encoders
- Current Sensors
- Pushbuttons/Lights
- Process
- Relays/Timers
- Comm.
- TB's & Wiring
- Power
- Circuit Protection
- Enclosures
- Appendix
- Part Index