

Enhanced 50 Series Polarized Reflex Photoelectric Sensors



1451E-6503



1451E-6513



1451E-6534

- 9 models available
- Fiberglass-reinforced plastic housing
- Field of view: 1.0°
- Cable wires or mini/micro connection termination
- NPN/PNP, Solid-State Relay, or SPDT EM Relay outputs
- IP67 rated

Note: Cutler-Hammer parts available for sale to North America locations only.


Enhanced 50 Series Polarized Reflex Photoelectric Sensors Selection Chart								
Part Number	Price	Voltage Range	Sensing Range*	Optimum Range*	Sensing Beam	Output Type	Connection Type	Cable Part Number
1451E-6517		10 - 40 VDC				NPN/PNP 250mA	6-foot cable (300V)	Pre-wired 6ft (1.8 m)
1451E-6547	4-pin Euro (Micro) DC connector						CSDS4A4CY2202 CSDS4A4CY2205	
1451E-6507	4-pin Mini connector						CSMS4A4CY1602 CSMS4A4CY1606	
1451E-6513		12 - 240 VDC 24 - 240 VAC	16ft. (4.9 m)	0.5 to 8 ft. (0.2 to 2.5 m)	Visible Red	Solid-state relay 300mA @ 240 VAC/VDC	6-foot cable (300V)	Pre-wired 6ft (1.8 m)
1451E-6543	4-pin Micro AC connector						CSAS4F4CY2202 CSAS4F4CY2205	
1451E-6503	4-pin Mini connector						CSMS4A4CY1602 CSMS4A4CY1606	
1451E-6514						SPDT EM relay 3A @ 120VAC	6-foot cable (300V)	Pre-wired 6ft (1.8 m)
1451E-6534	5-pin Micro AC connector (7.5" pigtail)						CSAS5A5CY2202 CSAS5A5CY2205	
1451E-6504	5-pin Mini connector						CSMS5A5CY1602 CSMS5A5CY1606	

**Note: Ranges based on 3-inch retro-reflector for reflex sensors.
Polarized sensors may not operate with reflective tape. Test tape selection before installation.*




Note: Purchase reflectors separately.

Characteristic curve chart

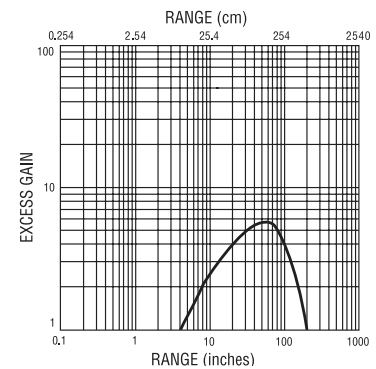

Spot dimension chart

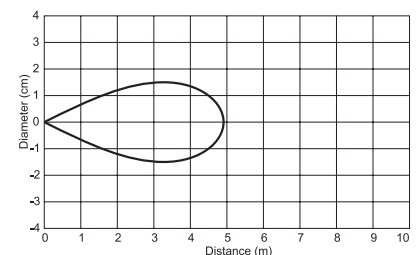

Wiring Diagrams

(Pin numbers are for reference only. Rely on pin location when wiring)

Operating Voltage	Models	Cable Models	Mini-Connector Models (Face View Male Shown)	Micro and Euro (Micro) Connector Models (Face View Male Shown)
10-40 VDC	Polarized Reflex			
12 - 240 VDC or 24 - 240 VAC	Polarized Reflex Solid-State Relay			
12 - 240 VDC or 24 - 240 VAC	Polarized Reflex SPDT EM Relay			

Ⓢ Connect load to appropriate output for either sinking or sourcing operation.

Enhanced 50 Series Photoelectric Sensors Selection Guide

Overview

The Enhanced 50 family of high performance photoelectric sensors offers outstanding features, flexibility and durability at an incredible price. Choose from a wide selection of Through-beam, Polarized Reflex, Diffuse and even Clear Object models all designed in

a rugged, industry standard, rectangular package. Each model comes with a variety of input options for maximum flexibility across many voltage ratings. Cabling choices include built-in mini-connector, micro-connector, pigtail micro-connector or a 6 ft. integrated

cable. Other convenient features included are Dark-On/Light-On selectability and Gain adjustment, available on all models. Use the Selection Guide below to find the sensor model that best suits your requirements.



Enhanced 50 Photoelectric Sensors Specifications by Model Type				
Specifications	Through-Beam	Diffuse	Polarized Reflex	Clear Object Detector
Voltage Range	10 - 40 VDC 12 - 240 VDC 24 - 240 VAC	10 - 40 VDC 12 - 240 VDC 24 - 240 VAC	10 - 40 VDC 12 - 240 VDC 24 - 240 VAC	10 - 40 VDC 12 - 240 VDC 24 - 240 VAC
Sensing Range	500 ft. (152 m)	10 ft. (3 m)	16 ft. (4.9 m)	45 in. (1.2 m)
Optimum Power	0.1 to 250 ft. (0.03 to 77 m)	1 to 60 in. (25 to 1520 mm)	0.5 to 8 ft. (0.2 to 2.5 m)	1 to 24 in. (25 to 610 mm)
Sensing Beam	Infrared	Infrared	Visible Red	Visible Red
Output Types	NPN/PNP 250 mA, Solid-state relay 300 mA @ 240 VAC/VDC, SPDT EM relay 3 A @ 120 VAC	NPN/PNP 250 mA, Solid-state relay 300 mA @ 240 VAC/VDC, SPDT EM relay 3 A @ 120 VAC	NPN/PNP 250 mA, Solid-state relay 300 mA @ 240 VAC/VDC, SPDT EM relay 3 A @ 120 VAC	NPN/PNP 250 mA, Solid-state relay 300 mA @ 240 VAC/VDC, SPDT EM relay 3 A @ 120 VAC

Enhanced 50 Photoelectric Sensors Specifications by Input Type			
Specifications	AC/DC EM Relay Models	AC/DC Solid-State Relay Models	DC Only Models
Input Voltage	12 - 240 VDC 24 - 240 VAC	12 - 240 VDC 24 - 240 VAC	10 - 40 VDC
Light/Dark Operation	Switch selectable		
Operating Temperature	-13° to 131°F (-25° to 55°C)		
Humidity	95% relative humidity, non-condensing		
Case Material	Fiberglass reinforced plastic		
Lens Material	Acrylic		
Vibration	IEC 60947-5-2 part 7.4.2		
Shock	IEC 60947-5-2 part 7.4.1		
Protection	Output short circuit and overcurrent protection, reverse polarity protection		
Enclosure Ratings	IP67		
Agency Approvals	IEC IP67, cCSAus, UL508 (CSA File 224447)	IEC IP67, cCSAus, UL508 (CSA File 224447)	IEC IP67, cCSAus, UL508 (CSA File 224447)
Output Load	3A @ 120 VAC 3A @ 28 VAC 3A @ 240 VAC	300 mA @ 240 VAC/VDC	250 mA
Response Time	15 ms	2 ms	
No Load Current Draw	<30 mA		
Leakage Current (max.)	—	1 mA @ 240 VAC	<10 µA
Indicator LEDs	Through-Beam Source..... All Others: Red: Power..... Green: Output Yellow: Power Red: Alignment		

EATON Enhanced 50 Series Photoelectric Sensors

Cutler-Hammer

Application Guide

The Enhanced 50 Series Photoelectric Sensors are a great fit for applications such as material handling, packaging, wrapping and sortation.


This family of sensors, with its four basic models (Through-beam, Polarized Reflex, Diffuse and Clear Object), meets the needs for almost any sensing requirement, including harsh

environments with excessive dust or high temperature.

Follow the application guide below to choose the best sensor model for your application.


Through-Beam

- Most accurate
- Longest sensing range
- Most reliable
- Must be installed in two points on system: emitter and receiver
- More costly

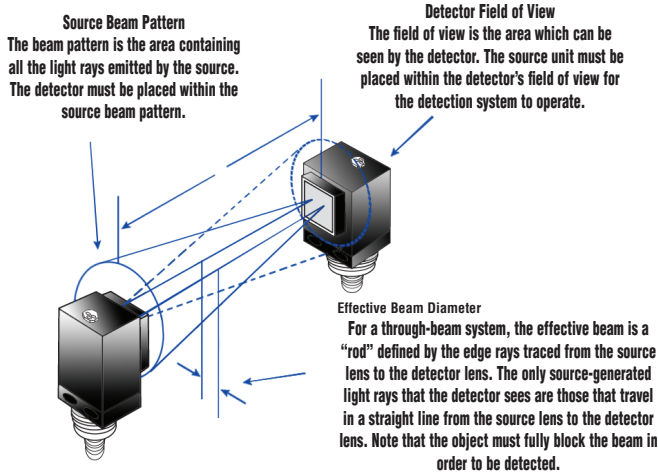


Diffuse

- Lower cost
- Install at one point
- Less accurate than Through-Beam or Polarized Reflex
- More setup time involved

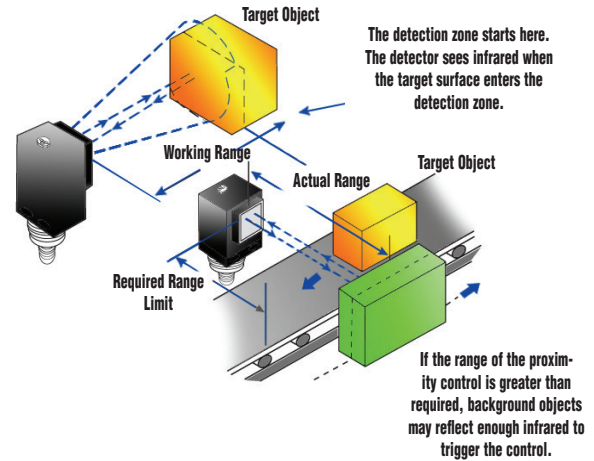


Polarized Reflex

- Lower cost than Through-Beam
- Longer sensing range than Diffuse
- Very reliable
- Must be installed in two points on system: sensor and reflector

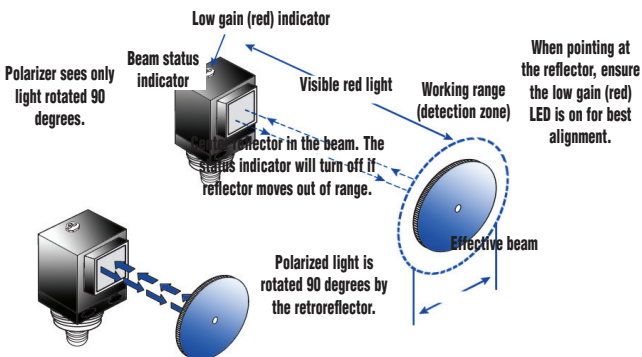





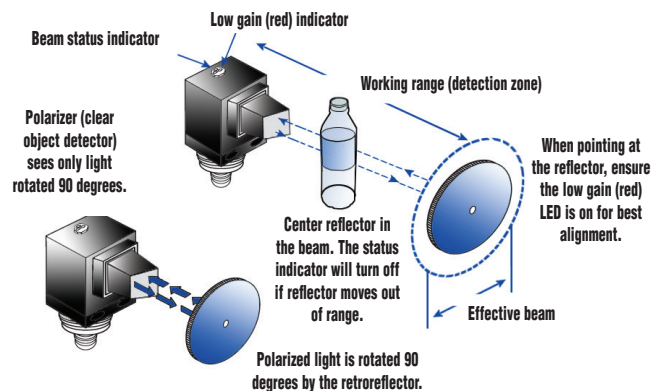





Clear Object Detector

- Most reliable for sensing transparent objects
- Must be installed in two points on system: sensor and reflector.
- Short sensing distance: 45 inches max.



Enhanced 50 Series Photoelectric Sensors Connector Cables

Enhanced 50 Series Cables Selection Chart				
Part Number	Price	Description	Gauge	Pin-Out Diagram
CSDS4A4CY2202		DC Euro (Micro) connector cable for quick-disconnect photoelectric sensors, straight female, DC 4-pin/4-wire, PVC, 6 feet (2 meter) length	22	 1-Brown 2-White 3-Blue 4-Black
CSDS4A4CY2205		DC Euro (Micro) connector cable for quick-disconnect photoelectric sensors, straight female, DC 4-pin/4-wire, PVC, 16.4 feet (5 meter) length	22	 1-Brown 2-White 3-Blue 4-Black
CSAS4F4CY2202		AC Micro connector cable for quick-disconnect photoelectric sensors, straight female, AC 4-pin/4-wire, PVC, 6 feet (2 meter) length, 1/2" - 20 UNF thread	22	 1-Red/Black 2-Red/White 3-Red 4-Green
CSAS4F4CY2205		AC Micro connector cable for quick-disconnect photoelectric sensors, straight female, AC 4-pin/4-wire, PVC, 16.4 feet (5 meter) length, 1/2" - 20 UNF thread	22	 1-Red/Black 2-Red/White 3-Red 4-Green
CSAS5A5CY2202		AC Micro connector cable for quick-disconnect photoelectric sensors, straight female, AC 5-pin/5-wire, PVC, 6 feet (2 meter) length, 1/2" - 20 UNF thread	22	 1-Brown 2-Blue 3-Gray 4-Black 5-White
CSAS5A5CY2205		AC Micro connector cable for quick-disconnect photoelectric sensors, straight female, AC 5-pin/5-wire, PVC, 16.4 feet (5 meter) length, 1/2" - 20 UNF thread	22	 1-Brown 2-Blue 3-Gray 4-Black 5-White
CSMS4A4CY1602		Mini connector cable for quick-disconnect photoelectric sensors, straight female, 4-pin/4-wire, PVC, 6 feet (2 meter) length, 7/8" - 16 UN thread	16	 1-Black 2-Blue 3-Brown 4-White
CSMS4A4CY1606		Mini connector cable for quick-disconnect photoelectric sensors, straight female, 4-pin/4-wire, PVC, 19.69 feet (6 meter) length, 7/8" - 16 UN thread	16	 1-Black 2-Blue 3-Brown 4-White
CSMS5A5CY1602		Mini connector cable for quick-disconnect photoelectric sensors, straight female, 5-pin/5-wire, PVC, 6 feet (2 meter) length, 7/8" - 16 UN thread	16	 1-Black 2-Blue 3-Orange 4-Brown 5-White
CSMS5A5CY1606		Mini connector cable for quick-disconnect photoelectric sensors, straight female, 5-pin/5-wire, PVC, 19.69 feet (6 meter) length, 7/8" - 16 UN thread	16	 1-Black 2-Blue 3-Orange 4-Brown 5-White



CSDS4A4CY2205



CSAS4F4CY2205



CSAS5A5CY2202



CSMS4A4CY1602



CSMS5A5CY1602

Note: Cutler-Hammer parts available for sale to North America locations only.


Connector Cables Specifications		
	Micro Style	Mini Style
Jacket Material	PVC	PVC
Contact Material	Gold-plated copper alloy	Gold-plated brass
Coupling Nut Material	Zinc die-cast epoxy-coat	Zinc die cast epoxy-coat
O-ring	Nitrile rubber	None
Cable	PVC insulation and jacket, stranded copper conductors	
Cable Strain Relief	35 pounds minimum	
Voltage Rating	320 V (24 VDC for LED plugs)	600 V
Current Rating	4A	4-pin: 10A 5-pin: 8 A
Contact Resistance	5 mΩ maximum	5 mΩ maximum
Isolation Resistance	1000 MΩ minimum	1000 MΩ minimum
Protection	IP67	NEMA 6P, IP68
Temperature Range	-25° to 90°C	-20° to 105°C
Cable Diameter (3/C = 3 Conductor)	22 AWG PVC: 4/C: 0.21 inch (5.3 mm) 5/C: 0.20 inch (5.1 mm)	16AWG PVC: 4/C: 0.42 inch (10.7 mm) 5/C: 0.50 inch (12.7 mm)
Bend Radius	Minimum recommended bend radius is 12X cable diameter	

Enhanced 50 Series Photoelectric Sensors Dimensions


Sensor Dimensions

(inches (mm))


Cable and Pigtail Connector* Version

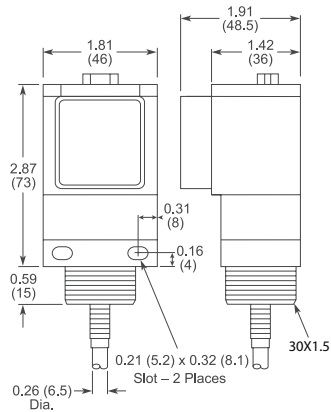


AC/DC Micro or Euro (Micro) Connector Versions

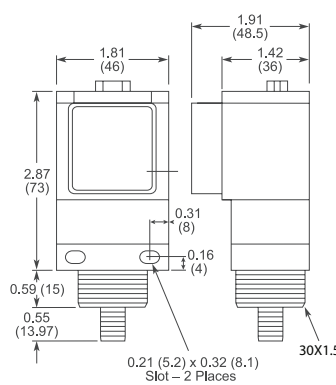


Mini Connector Versions

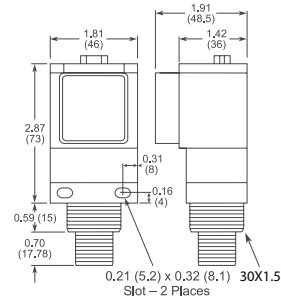

Clear Object Versions (Cable Version Shown)

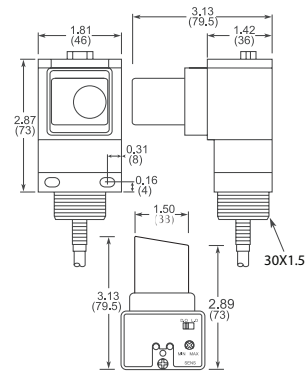

* Pigtail length: 7.5" nominal




Connector Cables Dimensions


(in/mm)

Micro Style Connector Cables


M12 x 1 (DC) connector cable

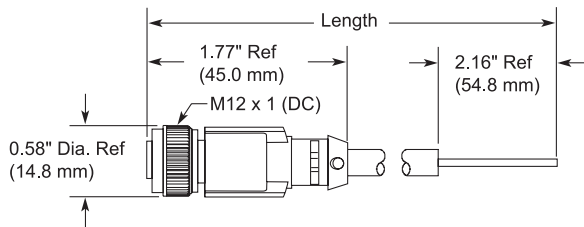

1/2" - 20 UNF-2B (AC) connector cable

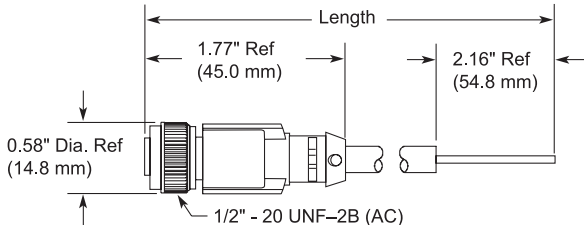

Mini Style Connector Cables

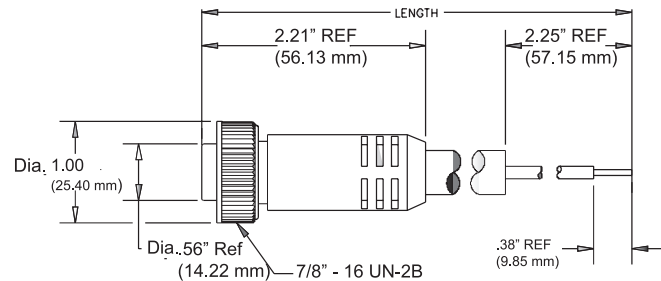

DFT Series Fiber Photoelectric Amplifiers

Compact rectangular plastic DIN-rail mount with Teach function - DC



- 4 models available
- DIN-rail mounting
- Bargraph signal-strength indicator
- NPN or PNP, Light-on/Dark-on selectable outputs
- Red LED with visible spot
- IP64 rated



DFT Series Fiber Photoelectric Amplifier Selection Chart							
Part Number	Price	Sensing Range	Output State	Logic	Connection	Wiring	Dimensions
DFT-AN-1A		Optical fiber dependent	N.O./N.C. selectable	NPN	2m (6.5') axial cable	Diagram 1	Figure 1
DFT-AN-1F					M8 (8mm) connector	Diagram 1	Figure 2
DFT-AP-1A				PNP	2m (6.5') axial cable	Diagram 2	Figure 1
DFT-AP-1F					M8 (8mm) connector	Diagram 2	Figure 2

Specifications		
Type	DFT-AN-1*	DFT-AP-1*
Sensing Distance	See Optical Fibers Table	
Light Spot Diameter	N/A	
Emission	red (680nm)	
Sensitivity	Dual Teach function	
Output Type	NPN Light On or Dark On Selectable Output delay or stretch programmable	PNP Light On or Dark On Selectable Output delay or stretch programmable
Operating Voltage	10-30VDC	
No-Load Supply Current	≤25mA	
Operating (Load) Current	≤200mA	
Off-state (Leakage) Current	≤0.1mA	
Voltage Drop	2V maximum at 200mA	
Switching Frequency	1.5kHz	
Ripple	≤20%	
Time Delay Before Availability (tv)	80ms	
Short-Circuit Protection	Yes (switch autoresets after overload is removed)	
Operating Temperature	-25° to +55° C (-13° to 131° F)	
Protection Degree	IEC IP64	
LED Indicators -Switching Status	Yellow (output energized)	
Housing Material	PBT	
Lens Material	Acrylic	
Shock/Vibration	See terminology section	
Tightening Torque	N/A	
Weight (cable/connector)	68g (2.39oz) / 17g (0.60oz)	
Connectors	2m (6.5') axial cable; M8 (8mm) connector	
Agency Approvals	UL file E328811	

Wiring diagrams

Diagram 1



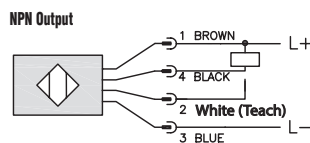


Diagram 2

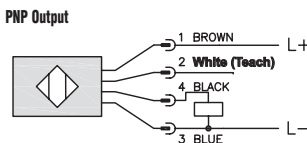

Connector



Dimensions

(mm)

Figure 1


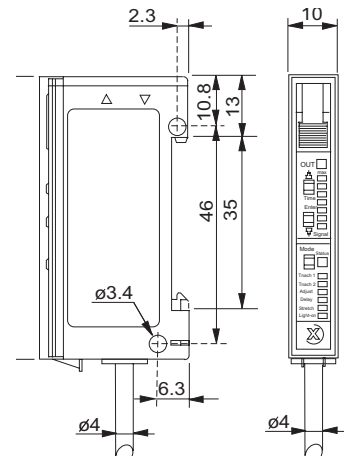


Figure 2

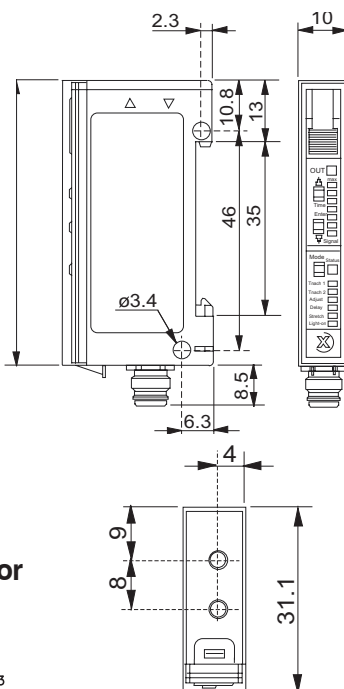

Accessories for 50 Series Photoelectric Sensors

Mounting Brackets


Short, tall or ball-swivel style of mounting brackets are available. All styles allow 360° rotation of the sensor.

Note: Cutler-Hammer parts available for sale to North America locations only.


Dimensions

mm [inches]


Accessories for Enhanced 50 Series Sensors			
Part Number	Price	Description	Weight [lb]
<u>6150E-6501</u>		Mounting bracket, right-angle, 1.5in vertical adjustment, nickel plated steel. For use with CH Enhanced 50 Series sensor.	0.20
<u>6150E-6502</u>		Mounting bracket, right-angle, 3.5in vertical adjustment, nickel plated steel. For use with CH Enhanced 50 Series sensor.	0.39
<u>6150E-6503</u>		Mounting bracket, right-angle ball swivel, 60 degree vertical and horizontal adjustment, plastic. For use with CH Enhanced 50 Series sensor. Ball swivel allows for ±30° angle.	0.11

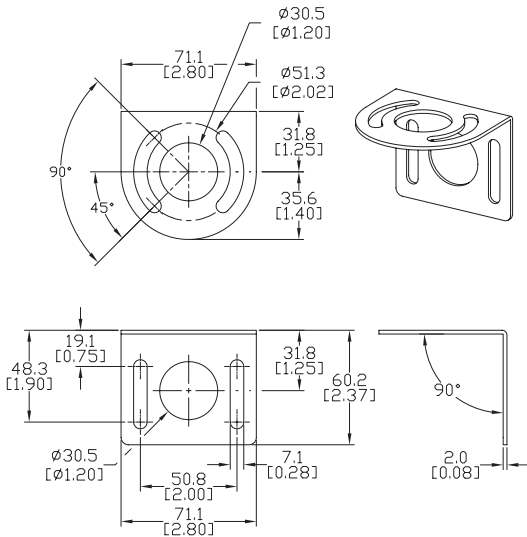

6150E-6501

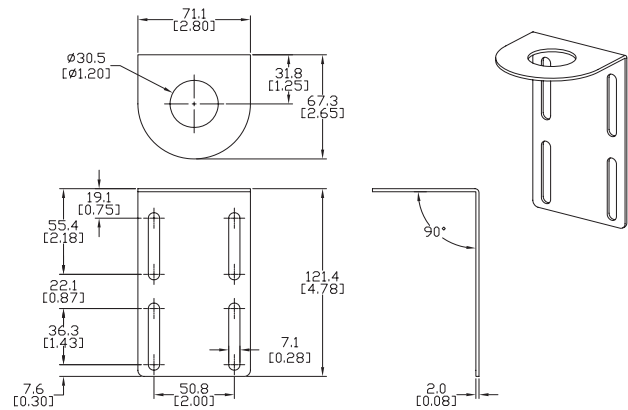

6150E-6502

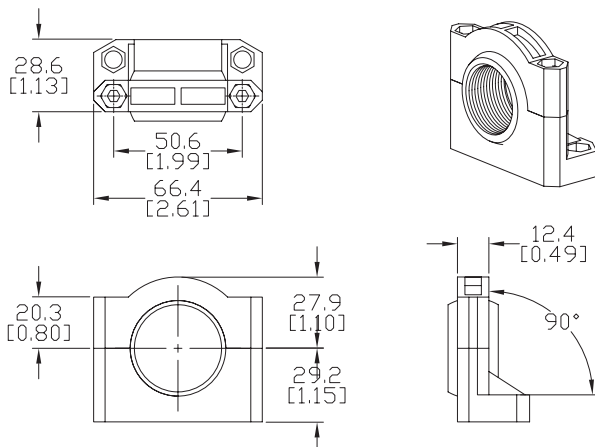


6150E-6503

Reflectors

RL Series Reflectors for Polarized Reflective Photoelectric Sensors (All Models)

- Suitable for use with polarized light photoelectric sensors
- Shapes and sizes for most applications
- Miniature types for close mounting in multiple sensor installations
- Single hole, dual hole and self-adhesive mounting types available
- Single and 10-packs available

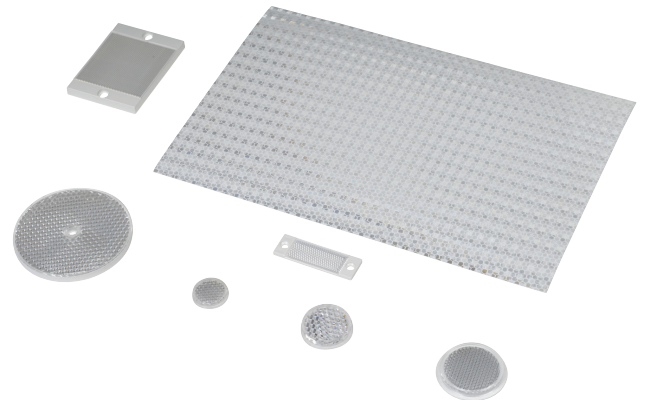

Installation Notes

- Keep the reflector surface clean to ensure peak detection performance. This is especially true when the maximum sensing range is being used. Clean using a damp cloth.
- When selecting a reflector, it is important to consider the ambient conditions it will be exposed to. Dusty or high humidity conditions may reduce the sensing range as much as 90%.
- Reflectors should be positioned at a 90° angle to the optical axis with a tolerance of ±15°.

Reflector Specifications							
Part number	Price	Drawing Link	Quantity	Dimensions mm [in]	Degree of Protection	Mounting	Materials
RL102		PDF	10	25	IEC IP67	Customer-supplied adhesive or other mounting method required	Reflective face: PMMA Polymethylmethacrylate (acrylic) Base material: ABS (Acrylonitrile-butadiene-styren)
RL102-1			1	[0.98]			
RL103		PDF	10	34.5			
RL103-1			1	[1.36]			
RL104		PDF	10	46			
RL104-1			1	[1.81]			
RL105G		PDF	10	95 x 38		Two 4.3 mm holes	
RL105G-1			1	[3.74 x 1.50]			
RL106G		PDF	10	182 x 42		Two 6mm holes	
RL106G-1			1	[7.17 x 1.65]			
RL110		PDF	10	84		One 5mm hole	
RL110-1			1	[3.31]			
RL116		PDF	10	41 x 60		Two 3mm holes	
RL116-1			1	[3.54 x 2.36]			
RL100DA4		NA	1	200 x 300		Self-adhesive	
RL100DC4		NA	1	50 x 300			
RL100DQ1		NA	1	100 x 100			
RL111G		PDF	10	22.5 x 47	Two 3mm slots	Reflective face: PMMA Polymethylmethacrylate (acrylic) Base material: ABS (Acrylonitrile-butadiene-styren)	
RL111G-1			1	[0.89 x 1.85]			
RL112G		PDF	10	19 x 73			
RL112G-1			1	[0.75 x 2.87]			
RL113G		PDF	10	51.4 x 60.3			Two 4mm slots
RL113G-1			1	[2.02 x 2.37]			

Not recommended for applications involving moist air environments or water immersion.

Reflectors

RL Series Reflectors for Polarized Reflective Laser Photoelectric Sensors (FALN series)

- Suitable for use with polarized light laser photoelectric sensors
- Sizes for most applications
- Miniature types for close mounting in multiple sensor installations
- Single and 5-packs available

Specifications						
Part Number	RL201	RL201-1	RL203	RL203-1	RL204	RL204-1
Price						
Drawing Link	PDF		PDF		PDF	
Quantity	5	1	5	1	5	1
Dimensions	60 x 82 mm 2.36 x 3.23 in		19 x 6mm 0.75 x 2.36 in		20mm x 32mm 0.80 in x 1.26 in	
Degree of Protection ¹	IEC IP67					
Mounting	Two 0.4 mm holes		Two 0.4 mm holes		Two 0.3 mm holes	
Materials	Acrylic/polycarbonate					

¹ Not recommended for applications involving moist air environments or water immersion.