

# EATON AEGIS Powerline Filters

The AEGIS Series Powerline filters/surge protectors are specifically designed to protect against the full spectrum of transient disturbances and are engineered to filter the entire sine wave. The Powerline filters are designed to react instantly to changes in voltage regardless of phase angle or polarity. As a result, AEGIS devices are effective against both low- and high-energy transients to prevent immediate equipment damage and failure of sensitive electronic equipment over time. Select the hybrid (ADPH) when the equipment value requires the highest level of RFI/EMI protection.

## Features

- Compact design
- DIN rail included 35 mm
- Meets latest UL safety standards for SPD (surge protective device) and EMI filtering protection
- Contains no replaceable parts or items that require periodic maintenance
- Alarm contact available (ADPH series only)
- 10-year warranty
- UL1449 3rd Ed – Type 2 SPD



ADPH12010

## Applications

- Process control systems
- Operator interface stations
- Programmable logic controllers (PLCs)
- Scanning devices
- Automatic teller machines (ATMs)
- Cash registers
- Alarm systems
- Robotics
- Control equipment
- CAD/CAM systems

AEGIS Powerline Filters		
Part Number	Description	Price
ADPV12001	120VAC input, 1A w/LED	
ADPV12003	120VAC input, 3A w/LED	
ADPV12005	120VAC input, 5A w/LED	
ADPV24001	240VAC input, 1A w/LED	
ADPV24003	240VAC input, 3A w/LED	
ADPV24005	240VAC input, 5A w/LED	
ADPH12010	Hybrid filter, 120VAC input, 10A w/LED and alarm contacts	
ADPH12015	Hybrid filter, 120VAC input, 15A w/LED and alarm contacts	
ADPH24010	Hybrid filter, 240VAC input, 10A w/LED and alarm contacts	
ADPH24015	Hybrid filter, 240VAC input, 15A w/LED and alarm contacts	

## Standards and Certifications

- cURus E316410
- CSA 163545
- UL 1449 Third Edition
- UL 1283 Fifth Edition
- Built in an ISO9001 facility
- Designed and tested in accordance with:
  - IEEE C62.41.1
  - IEEE C62.41.2
  - IEEE C62.43-2005
  - IEEE C62.45-2002
  - IEEE C62.48-2005
  - IEEE C62.62-2010
- RoHS compliant



ADPV12003

# EATON AEGIS Powerline Filters

## Technical Specifications

AEGIS Powerline Filters Technical Specifications								
	ADPH120xx		ADPH240xx		ADPV120xx		ADPV240xx	
<b>Input voltage range</b>	100-127 VAC		200-240 VAC		100-127 VAC		200-240 VAC	
<b>Amperage</b>	10A, 15A				1A, 3A, 5A			
<b>Frequency</b>	50/60 Hz				50/60 Hz			
<b>Protection modes</b>	L-N, L-G, N-G				L-N, L-G, N-G			
<b>Max continuous operations voltage (MCOV)</b>	150V		275V		150V		275V	
<b>EMI/RFI filtering attenuation</b>	75dB at 110kHz				50dB at 100kHz			
<b>Filter bandwidth</b>	10kHz to 100MHz				10kHz to 100MHz			
<b>Peak surge current per phase/mode</b>	60/30 kA				40/20 kA			
<b>UL nominal discharge current</b>	5kA				5kA			
<b>(VPR) UL voltage protection rating L-N / L-G / N-G</b>	400/330/330		700/600/600		400/330/330		700/600/600	
<b>Operating temperature</b>	-40°C to +50°C [-40°F to 122°F]				-40°C to +50°C [-40°F to 122°F]			
<b>Response time</b>	< 1 nanosecond				< 1 nanosecond			
<b>Status indicator</b>	LED				LED			
<b>Alarm contacts</b>	Yes (form C)				No			
<b>SCCR</b>	5kA				5kA			
<b>Product weight</b>	1.77 lb [0.80 kg]				1.15 lb [0.52 kg]			
<b>Wire gauge range</b>	22-10 AWG stranded copper for input/output terminals 30-18 AWG stranded/solid copper alarm contacts				22-10 AWG stranded copper for input/output terminals		-	
<b>Torque Specs</b>	9 lb-in [1.02 N-m] for input/output terminals 4 lb-in [0.45 N-m] alarm contacts terminals				9 lb-in [1.02 N-m] for input/output terminals		-	
<b>Environment protection ratings</b>	NEMA 1				NEMA 1			
<b>Component Material Type</b>	Plastic enclosure, type 950, rated UL94 V-0				Plastic enclosure, type 950, rated UL94 V-0			
<b>Alarm contact ratings*</b>	8A @ 250VAC / 30VDC				-			
<b>Input/output terminal size range for ferrules and ring/fork</b>					#6 stud size, 1/4" OD max			
<b>Alarm contacts terminal size range for ferrules and ring/fork terminals</b>	#4 stud size, 3/16" OD max				-			
<b>Mounting</b>					(35 mm) DIN rail mountable. No mounting orientation restrictions.			


\*Alarm contact and LED activation indicates power at output terminals.

Maximum EMI/RFI Attenuation – MIL-STD-220						
Model	10kHz	100kHz	1MHz	10MHz	100MHz	Max Attenuation Frequency
ADPH120xx	30dB	74dB	76dB	37dB	36dB	101dB at 0.5 MHz
ADPV120xx	27dB	56dB	55dB	36dB	28dB	66dB at 0.085 MHz

Let-Through Voltages Based on IEEE Std. C62.62-2010 Testing Waveforms		
Model	ADPH120xx	ADPV120xx
IEEE Category A, 100kHz ring wave, 6000V, 200A	25V	30V
IEEE Category B, 100kHz ring wave, 6000V, 500A	35V	40V
IEEE Category B, 100kHz ring wave, 6000V, 3000A (UL 1449-3 VPR)	360V	370V

Note: All tests conducted on 120VAC units only.



### Three-wire design has normal and common mode protection (L-N, L-G, N-G)

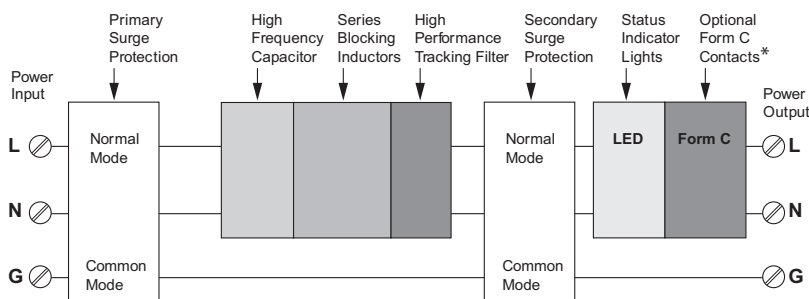

\*Available on the PH series only.

# EATON AEGIS Powerline Filters

## Dimensions in [mm]

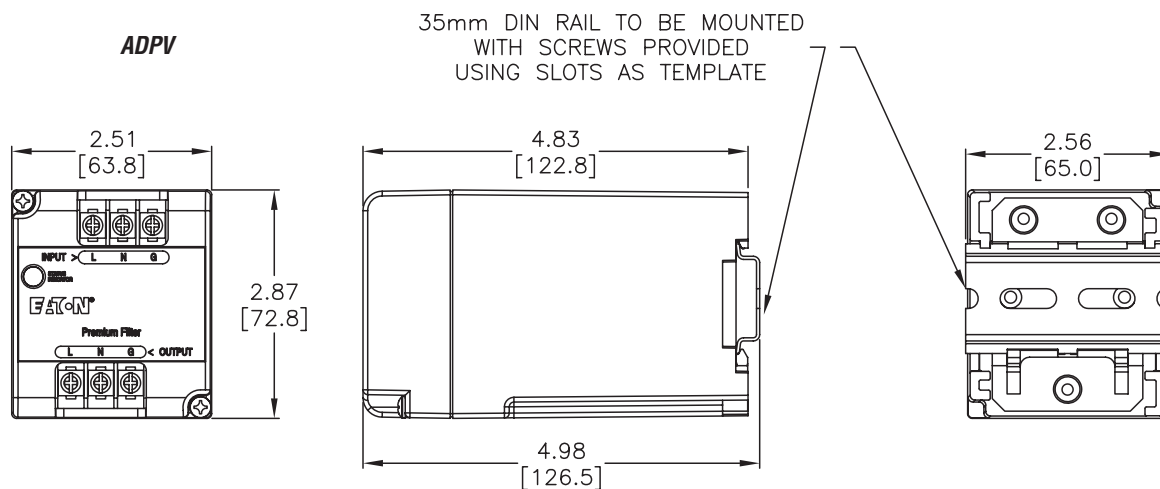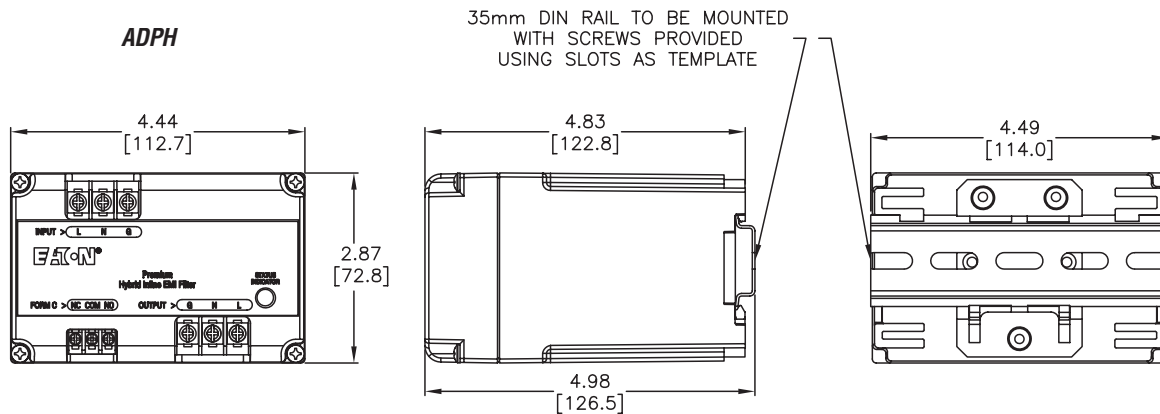

See our website: for complete engineering drawings

### Wiring Diagram

