

DW Series 4mm Stainless Steel Proximity Sensors



Miniature (4mm) stainless steel – DC

- Four models available
- Complete overload protection
- Factor 1 on steel and aluminum
- IP67 rated
- Stainless steel construction
- Full metal housing
- LED status indicator
- IO-Link versions available
- Lifetime warranty



DW Series Ø4mm DC Inductive Prox Selection Chart									
Part Number	Price	Size	Sensing Range	Mounting	Output State	Logic	Connection	Wiring	Dimensions
<i>Extended Distance</i>									
DW-AD-711-04		4mm	3mm (0.118 in)	Non-flush	N.O.	NPN	2m (6.5 ft) axial cable	Diagram 1	Figure 1
DW-AV-711-04-276						NPN	M8 with 0.2 m cable	Diagram 3	Figure 2
DW-AD-713-04*						PNP	2m (6.5 ft) axial cable	Diagram 2	Figure 1
DW-AV-713-04-276*						PNP	M8 with 0.2 m cable	Diagram 4	Figure 2

* IO-Link model

DW Series 4mm Stainless Steel Proximity Sensors

DW Series 4mm Specifications	
	DW-Ax-71x-04
Mounting Type	Non-flush
Nominal Sensing Distance	3mm (0.118 in)
Operating Distance	–
Material Correction Factors	See the Material influence table
Output Type	NPN or PNP, N.O.
Operating Voltage	10 to 30 VDC
No-load Supply Current	≤ 10mA
Operating (Load) Current	≤ 200mA
Off-state (Leakage) Current	≤ 0.1 mA
Voltage Drop	≤ 2V
Switching Frequency	≤ 1200Hz
Differential Travel (% of Nominal Distance)	≤ 10%
Repeat Accuracy	0.15 mm
Ripple	≤ 20%
Time Delay Before Availability (tv)	≤ 10ms
Reverse Polarity Protection	Yes
Short-Circuit Protection	Yes
Operating Temperature	-25 to 85°C (-13 to 185°F)
Protection Degree (DIN 40050)	IP67
Indication/Switch Status	Yellow LED (LED on continuously - secured operating zone)
Housing Material	Stainless steel V2A
Sensing Face Material	Stainless steel V2A
Shock/Vibration	IEC 60947-5-2/7.4
Tightening Torque	25 N•m (221.27 lb•in)
Weight	29g (1.02 oz) with cable, 9g (0.32 oz) without cable
Connection	2m cable (PUR [polyurethane] 3 x 0.14mm ² ≈ 26 AWG) or 0.2 m cable (PUR [polyurethane]) with M8 connection
Minimum Mounting Distance (center to center)	40.0 mm (1.57 in)
IO-Link	PNP/N.O. version only
Agency Approvals	CE, cULus E239373

Note: To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

Wiring diagrams

Diagram 1


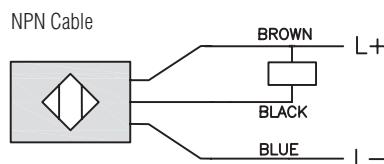


Diagram 2

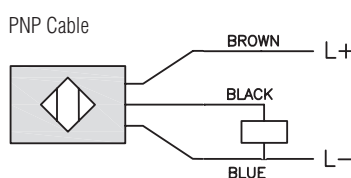

Connectors



Diagram 3


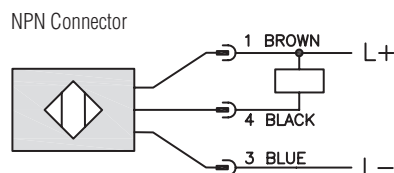


Diagram 4

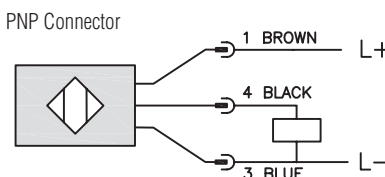

DW Series 4mm Stainless Steel Proximity Sensors

Dimensions

mm [inches]

Figure 1


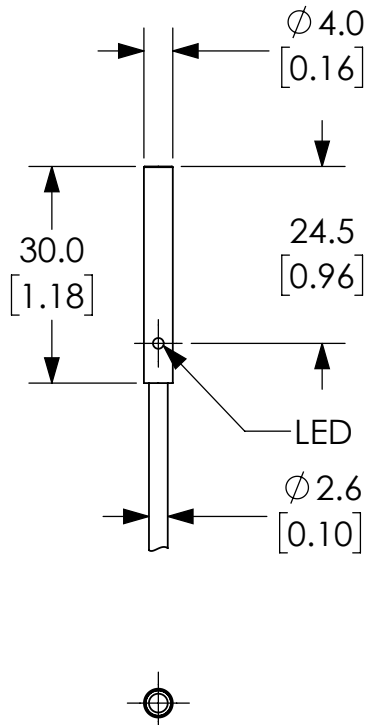


Figure 2

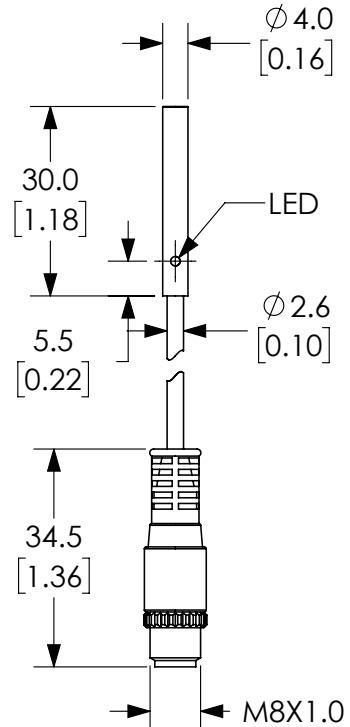

Accessories for 4mm Sensors

Right-angle Mounting Bracket

Mounting bracket, right-angle, plastic. For use with 4mm sensors.

Accessories for 4mm Sensors				
Part Number	Price	Description	Drawing Link	Weight [lb]
OPT2106		Wenglor mounting bracket, right-angle, plastic. For use with 4mm sensors.	PDF	0.02



OPT2106