

# RHINO PSB Power Supply Accessories

## Buffer Module

The RHINO PSB24-BFM20S buffer module is a cost effective alternative to battery-based backup systems. Utilizing electrolytic capacitors the buffer module is maintenance free and will maintain the output voltage of a 24VDC power supply system for 250 msec minimum with a 20A load and 5 sec minimum with a 1A load. A switch is provided to select the voltage level to start buffering. An inhibit input is available for remote shut-down as well as output signals for remote stand-by and buffering mode indication. The module is housed in a corrosion-resistant aluminum chassis with IP20 terminals and conformal coated circuit board for protection against demanding environments.



### Features


- Corrosion-resistant aluminum housing
  - Long minimum buffering time of 250ms @ 24V/20A
- Units can be connected in parallel to increase buffering time
- Less than 30 second charging time
- Approved for use in Class 1 Division 2 hazardous locations
- P20 wiring terminals
- Overvoltage / Overcurrent / Short Circuit protections
- Three year warranty



Buffer Module	
<b>Part Number</b>	<b>PSB24-BFM20S</b>
<b>Price</b>	
<b>Weight</b>	0.76 kg [1.68 lb]
Buffer Module Input Specifications	
<b>Nominal Input Voltage</b>	24VDC
<b>Voltage Range</b>	22.8 to 28.8 VDC (35VDC Max)
<b>Input Current</b>	Charging mode: < 0.6 A; Discharging mode: 20A Max
<b>Input Power</b>	2.5 W average
<b>Maximum Signal Input (Inhibit)</b>	35V / 10mA
<b>Max Inrush Current</b>	<20A
<b>Charging Time</b>	<30sec
Buffer Module Output Specifications	
<b>Nominal Output Voltage</b>	24VDC typ. (depends on $V_{in}$ )
<b>Adjustment Range Of The Voltage</b>	22 to 28VDC Switch = "Fix 22V" - Buffering starts if terminal voltage falls below 22V Factory Setting, Switch = " $V_{in} - 1V$ " - Buffering starts if terminal voltage is decreased by >1V
<b>Maximum Output Voltage</b>	35VDC
<b>Output Current</b>	20A max
<b>Buffering Time</b>	250ms Min @ 24V / 20A Load, 5sec Min @ 24V / 1A Load (Refer to Fig. 1)
<b>Maximum Signal Output</b>	35V / 10mA
<b>Signals</b>	Inhibit Signal (I) - "Low" = shuts down buffer module Ready Signal (R) - "High" = buffer module is fully charged or in standby mode Buffering Signal (B) - "High" = Buffer module is discharging or in buffering mode Supply Voltage (+ $V_S$ ) - Common + $V_S$ , 35V Max
<b>Noise and Ripple (20MHz)</b>	<200mVpp @ 25°C [77°F] during buffering mode
<b>Parallel Connection</b>	Yes (requires PSB60-REM redundancy module)
<b>Series Connection</b>	No
<b>Protective Device</b>	Transient voltage suppressor (TVS) for signals

# RHINO PSB Power Supply Accessories

**Figure 1** 1 Buffering Time (Typical Values at “V<sub>in</sub>-1V” Mode)

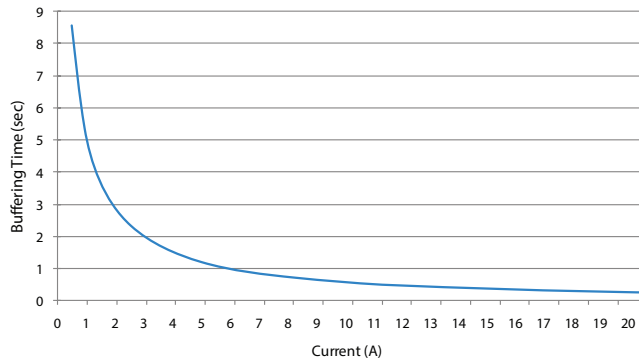

Buffer Module Mechanical Specifications	
<b>Case Cover</b>	Aluminum
<b>LED Indicators</b>	Green LED Off - Unit is discharged or Vin <22VDC Green LED On - Unit is fully charged
<b>Cooling System</b>	Convection
<b>Terminal</b>	Input / Output - M3 x 2 pins (Rated 300V / 30A) Signal - M3 x 5 pins (Rated 300V / 30A)
<b>Wire</b>	Input / Output - AWG 12-10 [0.08-0.10 in]; Torque: 0.72 Nm [6.3 lb-in] Signal - AWG 24-10 [0.02-0.10 in]; Torque: 0.72 Nm [6.3 lb-in]
Buffer Module Environmental Specifications	
<b>Operating Temperature</b>	-25°C to +75°C [-13°F to +167°F]
<b>Storage Temperature</b>	-25°C to +85°C [-13°F to +185°F]
<b>Power De-rating</b>	>70°C [158°F] de-rate power by 5% / °C
<b>Operating Humidity</b>	<95% RH (Non-Condensing)
<b>Operating Altitude</b>	2,500 Meters
<b>Shock Test (Non-Operating)</b>	IEC60068-2-27, 30G (300m/S <sup>2</sup> ) for a duration of 18ms
<b>Vibration (Non-Operating)</b>	IEC60068-2-6, 10 Hz to 500 Hz @ 30m/S <sup>2</sup> (3G peak); 60min per axis for all X, Y, Z direction
<b>Pollution Degree</b>	2
Buffer Module Protection Specifications	
<b>Overvoltage</b>	32V ± 10%
<b>Overload / Overcurrent</b>	30A Max
<b>Short Circuit</b>	No damage
<b>Penetration Protection</b>	>3.5mm (eg. screws, small parts)
<b>Reverse Polarity Protection</b>	Yes
<b>Degree of Protection</b>	IP20
<b>Protection Against Shock</b>	Class I with GND connection

# RHINO PSB Power Supply Accessories

Buffer Module Reliability Specifications	
<b>MTBF (at <math>V_{in}</math>-1V Mode)</b>	>2,800,000 hrs. as per Telcordia SR-332 at Standby Mode (Buffer Module in Ready State)
<b>Expected Capacitor Life</b>	10 years (Standby mode @ 40°C)
Buffer Module Safety Standards / Directives	
<b>Electronic Equipment in Power Installations</b>	EN50718 / IEC62103
<b>Electrical Safety (Information Technology Equipment)</b>	UR/cUR recognized to UL60950-1 and CSA C22.2 No. 60950-1 (file no. E198298), CB scheme to IEC60950-1
<b>Industrial Control Equipment</b>	UL/cUL listed to UL508 and CSA C22.2 No. 107.1-01 (file no. E197592) CSA to CSA C22.2 No. 107.1-01 (file no. 249074)
<b>Hazardous Location</b>	cCSAus to CSA C22.2 No. 213-M1987, ANSI / ISA 12.12.01:2007 [Class I, Division 2, Group A,B,C,D T4, Ta = -25°C to +75°C (> +70°C derating)], (file no. 249074)
<b>CE</b>	in conformance with EMC Directive 2004/108/EC and Low Voltage Directive 2006/95/EC
<b>Materials and Parts</b>	RoHS Directive 2011/65/EU Compliant
<b>Galvanic Isolation</b>	Input & Output to Ground - 1.5 KVAC Signal to Ground - 1.5 KVAC
Buffer Module EMC Specifications	
<b>EMC / Emissions</b>	CISPR32, EN55032, EN55011
<b>Component Power Supply for General Use</b>	EN61204-3
<b>Immunity</b>	EN55024, EN61000-6-2
<b>Electrostatic Discharge</b>	EN61000-4-2
<b>Radiated Field</b>	EN61000-4-3
<b>Fast Transient / Burst</b>	EN61000-4-4
<b>Surge</b>	IEC61000-4-5
<b>Conducted</b>	EN61000-4-6
<b>Power Frequency Magnetic Fields</b>	EN61000-4-8
<b>Voltage Dips</b>	EN61000-4-11
<b>Low Energy Pulse Test (Ring Wave)</b>	EN61000-4-12


Note: Product intended to be used as Apparatus with AC-DC Power Supply, EMC compliance to be verified in correspondence to the connected units.

## Dimensions

mm [inches]

PSB24-BFM20S


Wiring Connection			
Input		Output	
+	DC+	R	Ready
-	DC+	B	Buffering
I	Inhibit	+Vs	+ Voltage Supply
		⏏	Ground

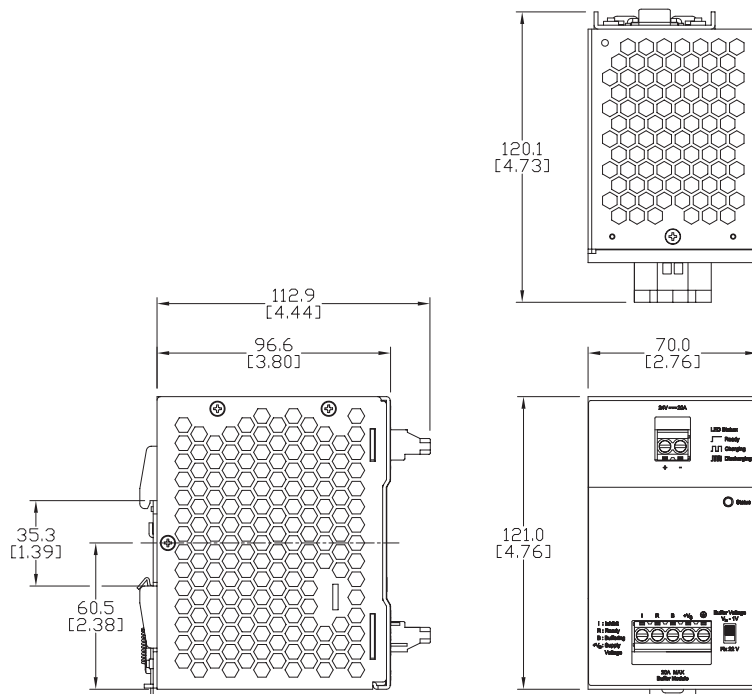


# RHINO PSB Power Supply Accessories

Buffering, Ready and Inhibit Signal	
<b>Buffering Output Signal (B)</b>	"High" = PSB24-BFM20S is discharging or in Buffering Mode
<b>Ready Output Signal (R)</b>	"High" = PSB-BFM20S is fully charged or in Standby Mode
<b>Inhibit Input Signal (I)</b>	"Low" = Shuts down Buffer Module
<b>Signal Voltage</b>	+VS: 10-35 VDC
<b>Maximum Signal Current</b>	10mA
<b>Isolation (Signal to Power)</b>	1.5 KVAC

## I/O (input/output) Example

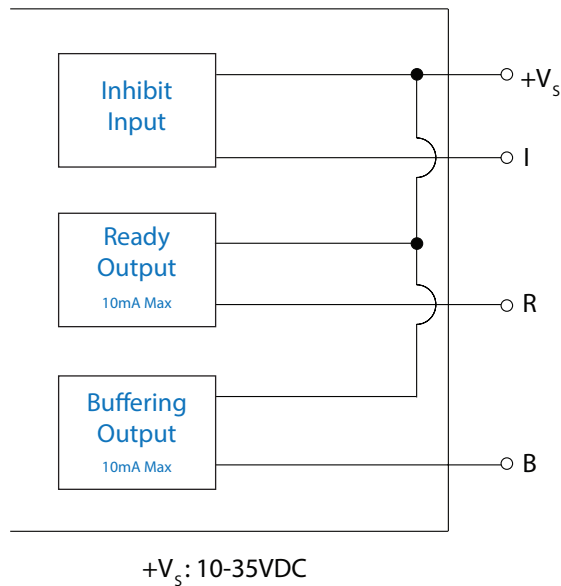


## Buffer Module Operations

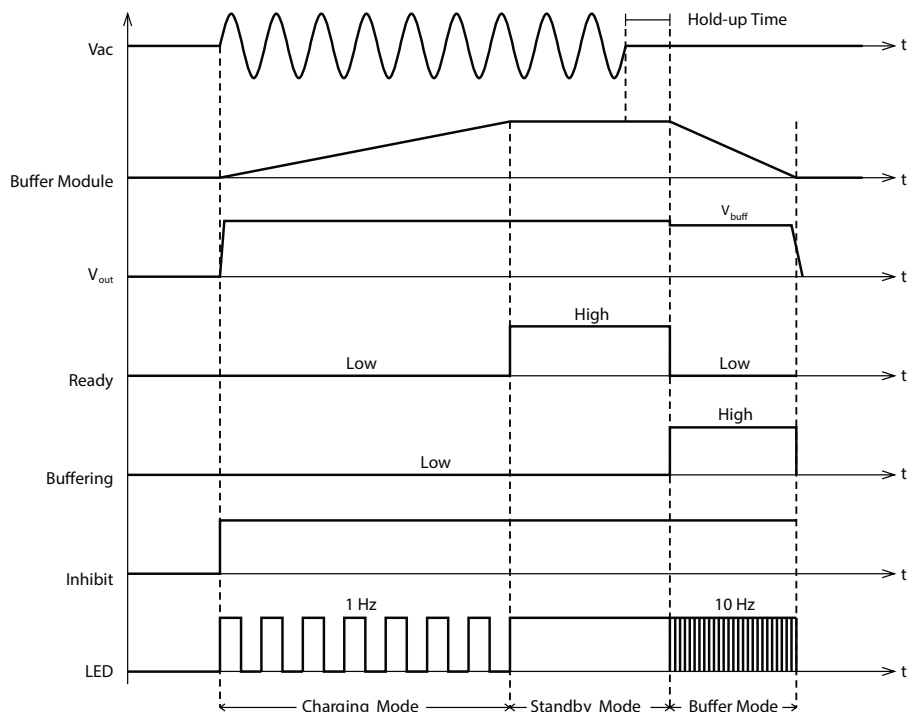


# RHINO PSB Power Supply Accessories

## Buffer Module Wiring


General connection / wiring diagram

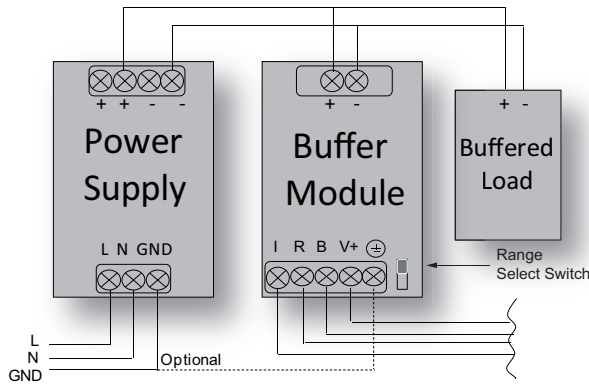

General signals wiring

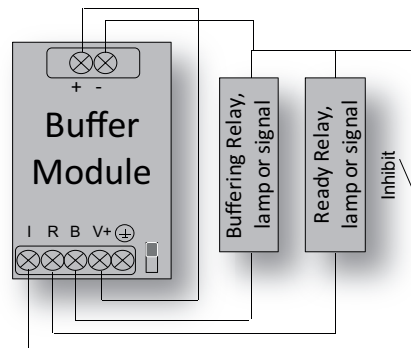

Paralleling of buffer units

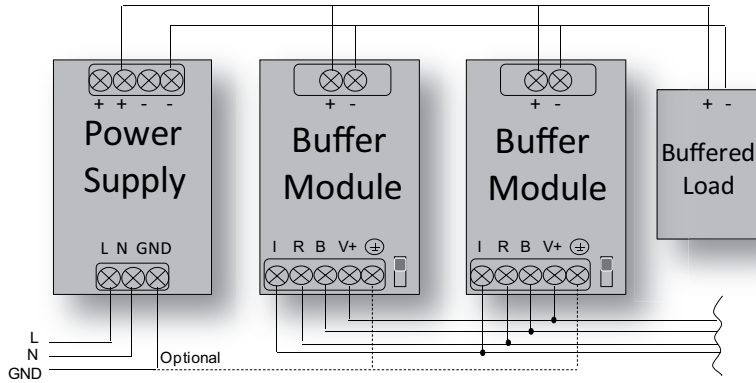

Decoupling of buffered branches

