

## Nylon Releasable Tab Cable Ties

These ties have a tongue for temporary cabling/fixing applications, enabling the tie to be reused.

- UL 94: V2 self-extinguishing nylon
- Suitable for indoor applications
- Rounded edges to avoid cable damage
- Operating temperature: -15 to +75°C [+5 to +167°F]
- CE



| Nylon Releasable Tab Cable Ties |          |       |         |        |       |       |      |               |      |               |      |                  |       |
|---------------------------------|----------|-------|---------|--------|-------|-------|------|---------------|------|---------------|------|------------------|-------|
| Part Number                     | Pcs/ Bag | Price | Color   | Length |       | Width |      | Min. Bundle Ø |      | Max. Bundle Ø |      | Tensile Strength |       |
|                                 |          |       |         | mm     | in    | mm    | in   | mm            | in   | mm            | in   | Kg               | lb    |
| <a href="#">RIA.2.232</a>       | 100      |       | natural | 200    | 7.87  | 7.5   | 0.30 | 10            | 0.39 | 50            | 1.97 | 36               | 79.37 |
| <a href="#">RIA.3.232</a>       | 100      |       | black   | 200    | 7.87  | 7.5   | 0.30 | 10            | 0.39 | 50            | 1.97 | 36               | 79.37 |
| <a href="#">RIA.2.231</a>       | 100      |       | natural | 250    | 9.84  | 7.5   | 0.30 | 10            | 0.39 | 65            | 2.56 | 36               | 79.37 |
| <a href="#">RIA.3.231</a>       | 100      |       | black   | 250    | 9.84  | 7.5   | 0.30 | 10            | 0.39 | 65            | 2.56 | 36               | 79.37 |
| <a href="#">RIA.2.233</a>       | 100      |       | natural | 280    | 11.02 | 7.5   | 0.30 | 10            | 0.39 | 76            | 2.99 | 36               | 79.37 |
| <a href="#">RIA.3.233</a>       | 100      |       | black   | 280    | 11.02 | 7.5   | 0.30 | 10            | 0.39 | 76            | 2.99 | 36               | 79.37 |
| <a href="#">RIA.2.234</a>       | 100      |       | natural | 360    | 14.17 | 7.5   | 0.30 | 10            | 0.39 | 100           | 3.94 | 36               | 79.37 |
| <a href="#">RIA.3.234</a>       | 100      |       | black   | 360    | 14.17 | 7.5   | 0.30 | 10            | 0.39 | 100           | 3.94 | 36               | 79.37 |

## Nylon Lashing Cable Tie

This nylon PA 6.6 wiring cable tie has a link above the head for inserting the left over tail which, after installation, does not need to be cut, thereby making installation faster. It can be buttonhole inserted through the teeth in the insert of the cable tie.

- UL 94: V2 self-extinguishing nylon
- Suitable for indoor applications
- Rounded edges to avoid cable damage
- Operating temperature: -15 to +85°C [+5 to +185°F]
- CE



| Nylon Lashing Cable Tie   |          |       |       |        |       |       |      |               |      |               |      |                  |        |
|---------------------------|----------|-------|-------|--------|-------|-------|------|---------------|------|---------------|------|------------------|--------|
| Part Number               | Pcs/ Bag | Price | Color | Length |       | Width |      | Min. Bundle Ø |      | Max. Bundle Ø |      | Tensile Strength |        |
|                           |          |       |       | mm     | in    | mm    | in   | mm            | in   | mm            | in   | Kg               | lb     |
| <a href="#">ASO.3.251</a> | 50       |       | black | 500    | 19.69 | 12.5  | 0.49 | 10            | 0.39 | 140           | 5.51 | 130              | 286.60 |

## Screw Mount Cable Tie

The eyelet tie is designed to tie cable bundles onto even sharp-edged supports, by rivets or screws (not included) inserted through the eyelet.

- UL 94: V2 self-extinguishing nylon
- Suitable for indoor applications
- Rounded edges to avoid cable damage
- Operating temperature: -5 to +85°C [+23 to +185°F]
- CE



| Screw Mount Cable Tie      |          |       |         |        |      |       |      |                    |      |               |      |               |      |                  |         |
|----------------------------|----------|-------|---------|--------|------|-------|------|--------------------|------|---------------|------|---------------|------|------------------|---------|
| Part Number                | Pcs/ Bag | Price | Color   | Length |      | Width |      | Mounting Head Hole |      | Min. Bundle Ø |      | Max. Bundle Ø |      | Tensile Strength |         |
|                            |          |       |         | mm     | in   | mm    | in   | mm                 | in   | mm            | in   | mm            | in   | Kg               | lb      |
| <a href="#">OCH.2.2123</a> | 100      |       | natural | 200    | 7.87 | 4.5   | 0.18 | 5                  | 0.20 | 3             | 0.12 | 51            | 2.01 | ≥ 22             | ≥ 48.50 |

## Cable Tie Cutting Tool


The special angle of this cutter's tips enables clean cuts of the ties to sizes between 2.5 and 12.5 mm in width, maintaining the wired electric cables intact. The cutter can also be used for cutting cables.



PIN.009

## Collar Fastening Metal Plier

This tool makes it easier to tighten and cut collars. Use with Double-headed Cable Ties. Leaves a short length of tail close to the head. For use with up to 9mm wide cable ties.

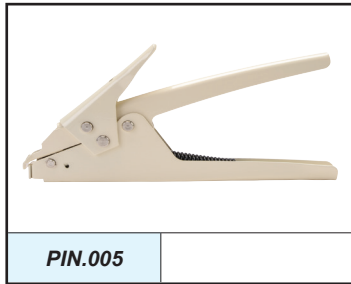

PIN.005

## Cable Tie Gun Installation Tool

For use with cable ties up to 5mm wide. This tool helps to adjust the preload and cut the tie. Tightening torque of 2.5 kg to 12kg.



PIN.003

## Bi-directional Nylon Square Bases






BAS.xMT.507



BAS.x.406

Note: Screw/mount not included

| Bi-directional Nylon Square Bases |         |       |         |               |                   |                  |
|-----------------------------------|---------|-------|---------|---------------|-------------------|------------------|
| Part Number                       | Pcs/Bag | Price | Color   | Dual Adhesive | Dimensions        |                  |
|                                   |         |       |         |               | A                 | B                |
| <a href="#">BAS.2MT.507</a>       | 100     |       | natural | Yes           | 18.8 mm [0.74 in] | 4.4 mm [0.17 in] |
| <a href="#">BAS.3MT.507</a>       | 100     |       | black   | Yes           |                   |                  |
| <a href="#">BAS.2MT.508</a>       | 100     |       | natural | Yes           | 26.5 mm [1.04 in] | 5.9 mm [0.23 in] |
| <a href="#">BAS.3MT.508</a>       | 100     |       | black   | Yes           |                   |                  |
| <a href="#">BAS.2.406</a>         | 100     |       | natural | No            |                   |                  |
| <a href="#">BAS.3.406</a>         | 100     |       | black   | No            |                   |                  |





# Cable Ties Family Overview

## General Purpose Nylon Cable Ties



SapiSelco general purpose Nylon 6.6 cable ties are slotted and held in place by the resistance of the elastic tooth against the rack. These cable ties are resistant to solvents and reagents, oil, gasoline, and hydrocarbons when used at low temperatures, in low concentrations, and for short periods of time. Assortment Kit available.

SapiSelco general purpose Nylon 6.6 cable ties are slotted and held in place by the resistance of the elastic



These ties are low-cost, releasable, and reusable cable ties, suitable for lightweight loads. The double-locking head enables securing two cable bundles with one tie. The body is completely rounded to eliminate all sharp edges guaranteeing reliable performance every time.

These ties are low-cost, releasable, and reusable cable ties, suitable for lightweight loads.

## Colored Nylon Cable Ties



SapiSelco colored Nylon 6.6 cable ties are useful in applications that require distinct identifiers. These ties are colored with inorganic dyes and are resistant to solvents and reagents, oil, gasoline, and hydrocarbons when used at low temperatures, in low concentrations, and for short periods of time. Assortment Kit available.

SapiSelco colored Nylon 6.6 cable ties are useful in applications that require distinct identifiers. These ties are colored with inorganic dyes and are resistant to solvents and reagents, oil, gasoline, and hydrocarbons when used at low temperatures, in low

## Specialty Cable Ties



Nylon Releasable Tab



Screw Mount



Low Temp



Nylon Lashing Cable Tie



Identification Ties



Double-headed (Collars)

## Stainless Steel Tooth Ties



SapiSelco stainless steel tooth ties are forged from nylon and hardened with added Molybdenum. This ensures extremely high mechanical strength and optimal resistance to corrosion. A single central raised section makes this tie particularly flexible, while guaranteeing maximum strength at the same time.

SapiSelco stainless steel tooth ties are forged from nylon and hardened with added Molybdenum. This ensures extremely high mechanical strength and optimal resistance to corrosion. A single central

## UV Resistant Cable Ties



Exposure to sun and ultraviolet rays causes deterioration in nylon. SapiSelco specialty Nylon UV Resistant cable ties can resist and endure the harsh conditions of outdoor applications for up to 10 years. These ties can withstand temperatures up to 125°C [257°F].

## Tools and Accessories



Cable Tie Cutting Tool



Collar Fastening Metal Plier

## Metal Detector Readable Cable Ties



These ties are fabricated with a special composite of 6.6 polyamide and metal powder and are sensitive to electromagnetic fields. They are recommended in the food, pharmaceutical and chemical industry. They are useful in applications where, for safety reasons, it is necessary for a metal detector to be able to detect even very small fragments of these ties that may be mixed in with products.

These ties are fabricated with a special composite of 6.6 polyamide and metal powder and are sensitive to electromagnetic fields. They are recommended in the food, pharmaceutical and chemical industry. They are useful in applications where, for safety reasons, it is necessary for a metal detector to be able to detect even very small fragments of these ties



Cable Tie Gun Installation Tool



Bi-directional Nylon Square Bases