Stride MQTT Gateway



Features

- Convert Modbus RTU/TCP to MQTT
- IIoT MQTT protocol with SSL/TLS
- Configurable via web page
- Hardware watchdog function
- Full electrical isolation
- Add this to your MQTT cloud, compatible with AWS, Mosquitto and more
- Wired or Wi-Fi models available



Stride MQTT Gateway Models				
Part Number	Ethernet	RS-485	WiFi	Price
SGW-MQ1611	√	√		
SGW-MQ1611-WF	√	√	√	

Ethernet Specifications	
Connector	RJ-45
Ethernet Port Speed	10/100Mbps auto-detected
Protocol	MQTT, Modbus TCP
Simultaneous Ethernet Connections	8

WiFi Specifications (Model SGW-MQ1611-WF Only)		
WiFi Standards	802.11 a/b/g/n/ac	
Frequency Bands	2.4/5.5 GHz	
Antenna	Internal	

Network Ports	
Web User Interface	80
Modbus	502 (default, software configurable)
МОТТ	Software configurable, determined by MQTT Broker

RS-485 Specifications	
Connector	Removable screw terminals, 5.08 mm pitch
Baud rate	Up to 115.2 kbps
Parity	Even, odd or none
Stop bit	1 or 2
Number of Serial Devices	32 max.
Switching Time TX/RX (RS-485)	150µs
Termination Resistance	120Ω





Stride MQTT Gateway

Electrical Specifications	
Power Supply Connector	Removable screw terminals, 5.08 mm pitch
Input Voltage Range	10–30 VDC
Current Consumption	max 300mA @ 24VDC
Isolation	
Power Supply / RS-485	1500VAC, 50Hz, 1 min.
Ethernet / RS-485	1000VAC, 50Hz, 1 min.
Ethernet / Power Supply	1500VAC, 50Hz, 1 min.
Reverse Polarity Protection	Yes

Mechanical Specifications	
Material	Self-extinguishing plastic
Mounting	35mm DIN rail (EN50022 and EN50035)
Weight	Approximately 200g

Environmental Specifications		
Operating Temperature	0°C to +60°C [32°F to 140°F]	
Storage Temperature	-20°C to +70°C [-4°F to +158°F]	
Humidity	0–90%, noncondensing	
Maximum Altitude	2000m	
IP Rating	IP20	
Installation	Indoor	
Category of Installation	II	
Pollution Degree	2	
EMC		
Immunity	EN61000-6-2	
Emission	EN61000-6-4	
Agency Approvals	CE, FCC, RoHS	


[1.77]

46.1 [1.81]



NOTE: INSTALLATION OF THE WI-FI MODEL IN A METAL CABINET IS NOT RECOMMENDED, AS THE CABINET MAY BLOCK THE WI-FI SIGNAL.

Dimensions

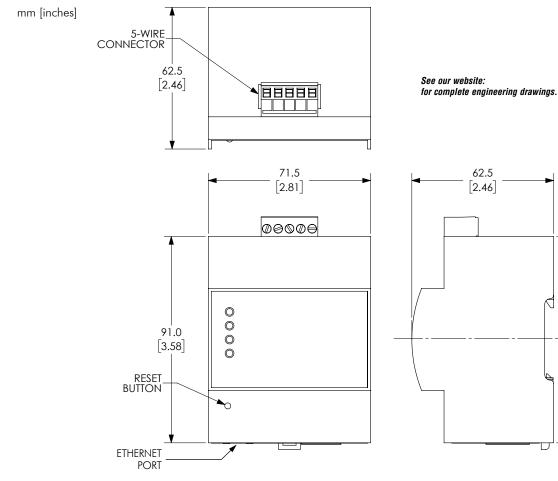

/communications Communication Products tCMP-49