





Beacon Accessories

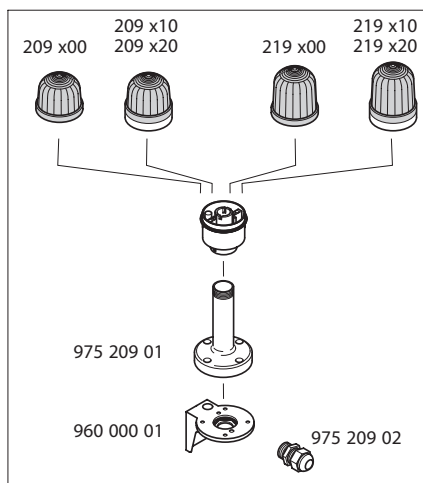

WERMA Beacons Accessories						
Part Number	Price	Drawing Link	Description	Operating Temp.	Material	Weight
Installation Beacon Accessories						
97581201		PDF	Tube adapter for beacons with 37mm (PG29) mounting installation. Find tube adapter accessories in WERMA Stack light catalog section.	-4 to 122°F [-20 to 50°C]	Polyamide / Fiberglass	1.13 g [0.04 oz]
97581202		PDF	Surface mounting base for beacons with 37mm (PG29) mounting installation		Polyamide / Fiberglass with rubber seal	2.83 g [0.1 oz]
97581503		PDF	Surface mounting enclosure for 1 beacon with 37mm (PG29) mounting installation		Polycarbonate/ ABS blend	8.5 g [0.3 oz]
97581507		PDF	Surface mounting enclosure for 2 beacons with 37mm (PG29) mounting installation			14.17 g [0.5 oz]
97581508		PDF	Surface mounting enclosure for 3 beacons with 37mm (PG29) mounting installation			17g [0.6 oz]
97581522		PDF	Anti-twist washer for beacons with 37mm (PG29) mounting installation		304 Stainless steel	0.57 g [0.02 oz]
Freestanding Beacon Accessories						
96000001		PDF	Bracket for tube mounting - for use with for use with 219 and 209 series industrial signal beacons.	-4 to 122°F [-20 to 50°C]	Polyamide	57g [2.01 oz]
97520901		PDF	Plastic Base with integrated tube for WERMA industrial signal beacons- for use with 209 and 219 series beacons		Polyamide	0.1 lbs [1.6 oz]
97520902		PDF	Cable gland for WERMA industrial signal beacons: M25x1.5, plastic - for use with 209 and 219 series industrial signal beacons		Nylon	0.1 lbs [1.6 oz]
97582603		PDF	Galvanized Wire Guard for WERMA industrial signal beacons - for use with 826, 827, 828 and 829 series industrial signal beacons		Wire D 3mm, chromed	140g [4.93 oz]
97582605		PDF	Plastic Bracket for wall mounting for use with WERMA signal beacons - for use with 826, 827, 828 and 829 series industrial signal beacons		Polycarbonate/ ABS blend	62g [2.19 oz]

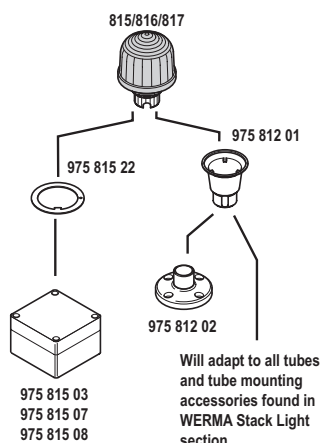



WERMA
SIGNALTECHNIK

Optical Signal Devices

98mm Base Mount Beacons

Features

- Choose from permanent incandescent, permanent LED, flashing Xenon, EVS (Enhanced Visibility System) flashing LED, and rotating models
- Base mount installation
- 98mm diameter
- Light-intensive Xenon flash in flash models
- Bulb not included with 826 incandescent models
- 25W bulb included with 827 incandescent models
- Various mounting accessories available
- 2 year warranty



826, 827, and 828 Series Beacons Technical Specifications

Part Number	Price	Color	Drawing link	Description	Voltage	Current	Starting Current	Operating Temp /Protection	Life Duration	Housing Material	Weight g [oz]	Connection	Agency Approvals			
74mm Base Mount																
82610000		Red	PDF	Incandescent Permanent Light 98mm	12–240V AC/DC max (depends on bulb selection; bulb sold separately)	Depends on bulb selection. (bulb sold separately)	-	-4 to 122°F [-20 to 50°C] IP65 when mounted	Up to 5,000h	Polycarbonate cap Polycarbonate/ABS base	180 [6.35]	Terminal screws Max 2.5 mm² AWG 16–14 Cable diameter 5–8 mm	cULus file E164155, CE, RoHS			
82620000		Green	PDF													
82630000		Yellow	PDF													
82640000		Clear	PDF													
82650000		Blue	PDF													
82710075		Red	PDF	Incandescent Blinking Light (1.5 Hz blinking frequency, 5Ws flash energy) 98mm	24V AC/DC	max. 3.0 A	≤ 3.0 A				4,000,000 flashes			Polycarbonate cap Polycarbonate/ABS base	207 [7.30]	
82720075		Green	PDF													
82730075		Yellow	PDF													
82740075		Clear	PDF													
82750075		Blue	PDF													
82710077		Red	PDF	Xenon Flashing Light (1Hz flash frequency, 1W flash energy) 98mm	115V AC/DC	max. 500mA			4,000,000 flashes	Polycarbonate cap Polycarbonate/ABS base					220 [7.76]	
82720077		Green	PDF													
82730077		Yellow	PDF													
82740077		Clear	PDF													
82750077		Blue	PDF													
82810055		Red	PDF	Xenon Flashing Light (1Hz flash frequency, 1W flash energy) 98mm	24VDC	300mA					4,000,000 flashes			Polycarbonate cap Polycarbonate/ABS base		220 [7.76]
82820055		Green	PDF													
82830055		Yellow	PDF													
82840055		Clear	PDF													
82850055		Blue	PDF													
82810067		Red	PDF		115VAC	65mA 50–60 Hz										
82820067		Green	PDF													
82830067		Yellow	PDF													
82840067		Clear	PDF													
82850067		Blue	PDF													

Bulbs



95582635

Bulbs						
Part Number	Price	Description	Wattage	Voltage	For Use With	Life Duration
95582635		Bulb for incandescent light BA15d bayonet socket	15W	24V AC/DC	826xxxxx	up to 5,000h
95582637				115VAC		
95582638				230VAC		
95582735		Bulb for blinking incandescent light B15d bayonet socket	25W	24V AC/DC	827xxxxx	up to 2,000h
95582737				115VAC		
95588524		Halogen bulb G6.35	20W	12V	885xxx78	
95588525				24V	885xxx75	



95582735



95588524